


### Specifications:

- 12VDC to 24VDC operation.
- 3VDC to 24VDC 2mA - 16mA isolated trigger.
- DPDT contacts rated at 2A/120VAC/28VDC
- DIN Rail mountable (order part # CLIP4).

### Board Dimensions (W x L x H):

1.9" x 2.75" x 1.1"

(48.3mm x 69.9mm x 27.9mm)

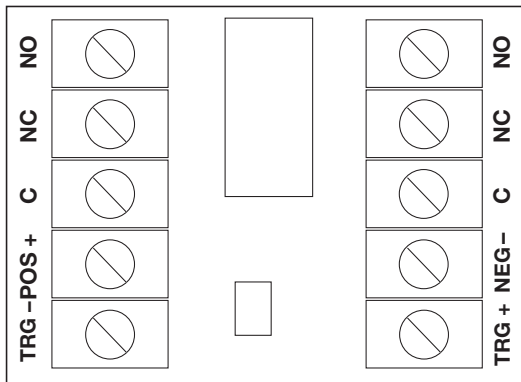

### Installation Instructions:

1. Connect 12VDC or 24VDC power supply (regulated) to the terminals marked [POS +] and [NEG -]. Carefully observe polarity.
2. Connect trigger voltage to the terminals marked [TRG +] and [TRG -].
3. Use output contacts to make and break load circuits.

**Note:** When using a common power source, the unused trigger terminal must be jumpered to its respective POS (+) or NEG (-) power supply terminal.

Altronix is not responsible for any typographical errors. Product specifications are subject to change without notice.

140 58th Street, Brooklyn, New York 11220 USA | phone: 718-567-8181 | fax: 718-567-9056

website: [www.altronix.com](http://www.altronix.com) | e-mail: [info@altronix.com](mailto:info@altronix.com) | Lifetime Warranty

IIRBSNTTL - Rev. 020106

F21U