

Description: 20 AWG RG59/U COAX + 18/2 CL2
 Compliance: UL13 & 444, NEC Article 820


Construction:

Conductors 20 AWG Solid Bare Copper center conductor
 2 x 18AWG 16/30 Stranded Bare Copper

<u>Insulation</u>	<u>Coax</u>	<u>Insulated Conductors</u>
Type	Foamed Poly	Polypropylene
Color	White	Blk,Red
Thickness	0.057" nom.	0.006" nom.
Diameter	0.145" nom	0.058" nom

	<u>Braid</u>
Strands	0.0063" nom. Bare Copper
% Coverage	95 nom.

<u>Jacket</u>	<u>Overall</u>	<u>Coax</u>
Type	PVC	
Color	White	
Thickness	0.020" nom.	0.034" nom
Diameter	0.360 x 0.285" nom.	0.242" nom.

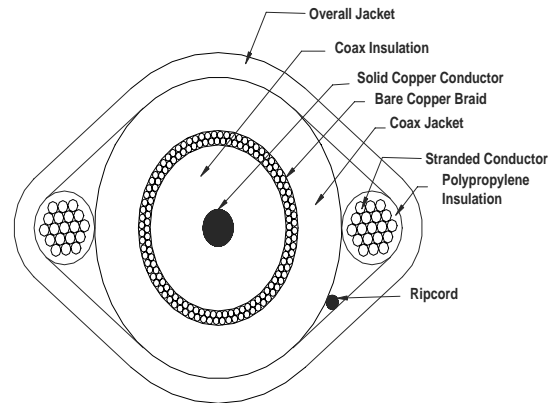

Legend (Ink Print) HONEYWELL P/N 5009 RG 59/U 20 AWG CCTV PREMIUM + 18/2 3038058 (ETL) TYPE CL2 75C
 SUN. RES. (RoHS) W/O# XXXXXX-XXX XXXX FT CAMERA/ZONE A B C D E F 1 2 3 4 5 6 7 8 9

Properties

Temperature Rating -20 to 75 °C
 Capacitance 17 pf/ft nom.
 Impedance 75 Ohms nom.
 Resistance (Conductor) 10.9 Ohms/M' at 20°C
 Resistance (Shield) 2.6 Ohms/M' at 20°C
 Attenuation (db/100') 0.2 at 1 MHz, 5.9 at 400 MHz, 10.8 at 1000 MHz
 Flame Rating UL Vertical Tray