



33-Zone Walk through Metal Detector

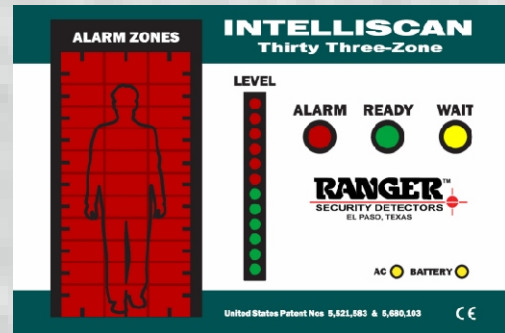

INTELLISCAN 33-Zone Graphic Alarm Display
The Intelliscan can operate in "All Metal Mode" or advance "Discrimination Modes". Factory Presets and under programmable modes can target specific types of metal or alloys for enhanced loss prevention.

- 33 Detection Zones
- Discrimination Mode Capable
- 20 Factory Programs & 4 User Define
- Integrated Floor Mounting Boots
- United States Patented technology
- Tamper-proof Key switch and access code
- Audible and Visual alarm for each zone
- Level bar graph indicating alarm signal
- Non-volatile memory for ultimate Security
- Integrated Floor Mounting Boots
- Traffic Pacing Stop & Go Lights
- 180 Degree View Angle Panel LEDs
- Optional RangerNet Networking

U.S. Patent Numbers: 5,521,58, 5,680,103, & 5,973,595



INTELLISCAN II

33-Zone Walk through Metal Detector

Applications of the Intelliscan Eighteen-Zone

- . Airports and Seaports
- . Government Buildings
- . Embassies
- . Police Facilities
- . Courthouses
- . Prisons and jails
- . Military Bases
- . Hospitals
- . Banks
- . Financial Institutions
- . Colleges and Schools
- . Hotels and Casinos
- . Power plants
- . Research Sites
- . Sports Stadiums
- . Public Transportation
- . Public Landmarks
- . Factories and Warehouses
- . Broadcast Studios
- . Museums
- . Night Clubs

General Features of the Intelliscan Multi-Zone

- . 33 Independent Detection Zones
- . Advanced Discrimination Capabilities
- . Security Level Program Factory Presets
- . User Programable Processor
- . Digital Signal Processing and Diagnostics
- . Interference Rejection Circuit
- . Adjustable Zone Sensitivity
- . Security Password
- . Continuous Wave Technology
- . Harmless to Pacemakers and Pregnant Women

Optional Features Available

- . RangerNet Networking Software & Hardware
- . Wheel Kit for Easy Transporting
- . Back Up Battery System
- . Fiber Optic Remote Display
- . Executive Styling and Weather Proof Exterior Finishes Options

Weather proof option for outdoor. This option can support rain, dust, heat and cold weather. (Ip65)



Dimensions, Weight, and Power Requirements



Shipping Dimensions and Weight

Header:

34"x11"x25" (85x27.5x62.5cm)
371lbs (15.45 Kg)

Side Panels:

91"x9"x27" (227.5x22.5x67.5cm)
144lbs (65.45 Kg)

Power Requirements:

115-230 VAC, 50-60 Hz

Warranty Information

Ranger Security Detectors, Inc. Warrants the 33-Zone against defects in workmanship or materials, under normal use, for a 2-year period from the date of purchase to the original user. Liability in all events is limited to purchase price paid. Liability under aforesaid warranty is limited to replacing cost prepaid to Ranger Security Detectors El Paso factory.



11900 Montana Avenue
El Paso, Texas 79936
Tel No. 915-590-4441
Fax No. 915-592-1043
Website: www.rangersecurity.com
Email: info@rangersecurity.com

Specifications

The 33-Zone meets Regulatory requirements for Electromagnetic safety.

Ranger Products Have no effects on pregnancy and people with peace makers