





THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES.
ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED
WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES.
ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

ALL DIMENSIONS ARE REFERENCE ONLY

PART NO.


RT-1200-I

REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	11/4/03	JDMc

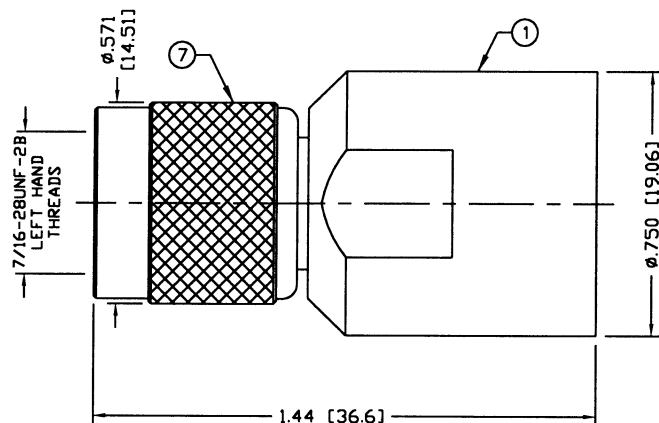


SPECIFICATIONS:

IMPEDANCE: 50 Ohms
FREQUENCY RANGE: 0-7 GHz
WORKING VOLTAGE: 500 V rms @ sea level
INSULATION RESISTANCE: 5k M ohms min.
TEMPERATURE RANGE: -65°C TO +85°C
FOR BELDEN 8214, 9913, 9913F, 9914, RG-8/U TYPE,
CAROL C1180, TIMES AA-5886 & LMR-400 CABLE



RECOMMENDED CRIMP DIE: .128"

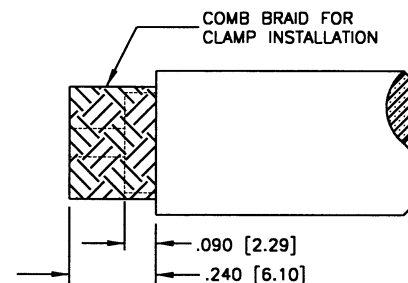

RECOMMENDED STRIPPING INSTRUCTIONS

1	BODY	1	BRASS	SILVER, 80 μ"	000000	
2	PIN	1	BRASS	GOLD, 30 μ"		
3	INSULATOR	1	PTFE	---		
4	GASKET	1	RUBBER	---		
5	LOCK WASHER	1	BRASS	SILVER, 80 μ"		
6	RETAINING RING	1	BRASS	---		
7	SHELL	1	BRASS	SILVER, 80 μ"		
8	PRESS WASHER	1	BRASS	SILVER, 80 μ"		
9	CLAMP	1	BRASS	SILVER, 80 μ"		
10	GASKET	1	RUBBER	---		
11	WASHER	1	BRASS	SILVER, 80 μ"	DRAWN C. ZUNIGA	11/4/03
12	BACK NUT	1	BRASS	SILVER, 80 μ"	CHECKED 	11-4-03
13					ORJ DRAWN	
14					C. ZUNIGA	11/4/03
#	DESCRIPTION	QTY	MATERIAL	FINISH	APPROVALS	DATE

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
AND [MILLIMETERS]

UNLESS OTHERWISE NOTED
TOLERANCES ARE:

DECIMALS

DIAMETER

RF connectors
DIVISION OF RF INDUSTRIES, LTD.

7610 MIRAMAR RD
SAN DIEGO, CA 92126
(858) 549-6340
(858) 549-6345 FAX

TNC PLUG, CLAMP

REVERSE THREAD

SIZE	CABLE GROUP	DWG NO.	REV
A	I	RT-1200-I	-
SCALE:	NTS	CAD FILE OUTLINE	SHEET 1 OF 1