

SPECIFICATIONS:

POWER RATING:

2 WATTS MAX. @ 40°C.

2.4 WATTS MAX. @ 25°C.

CONNECTOR: N-TYPE MALE

FREQUENCY RANGE & VSWR:

DC TO 1 GHz AT 1.10:1 MAX.

1 GHz TO 6 GHz AT 1.25:1 MAX.

IMPEDANCE: 50 OHMS NOMINAL

AMBIENT TEMPERATURE: RANGE: -40°C TO +40°C

OPERATING POSITION: ANY


COOLANT: DRY (CONVECTION COOLED)

FINISH: SILVER OR TRI-ALLOY PLATED

NOMINAL SIZE: APPROX. 1.26" L X .48" DIA.

WEIGHT: APPROX. 1.4 oz. (38 g)

REVISIONS			DWG. NO.	2-T-MN	SHEET 1	REV B
ZONE	REV	DESCRIPTION	DATE	APPROVED		
	A	ECN #0049	3-27-96	MAV		
	B	ECN #0263	10-31-00	MAV		

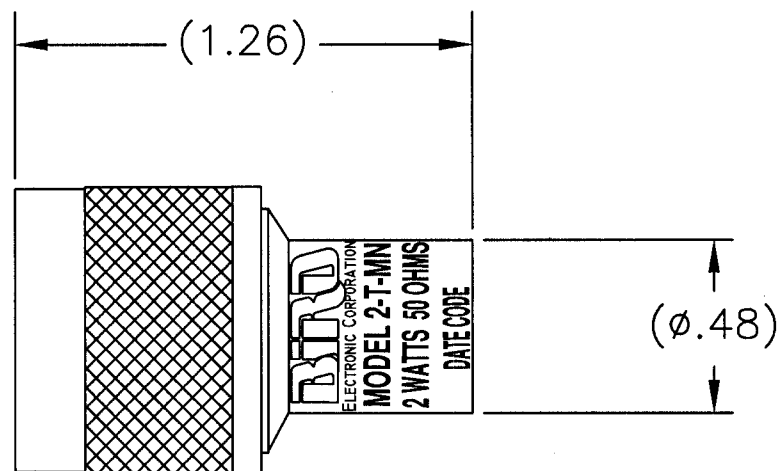

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

FRACTIONS DECIMALS ANGLES
± 1/64 .XX = ± .010 ± 30'
.XXX = ± .005

DO NOT SCALE DRAWING

MILLIMETERS

.X = ± .4
.XX = ± .12

THIS DRAWING IS THE PROPERTY OF THE BIRD ELECTRONIC CORPORATION. THE DESIGNS AND SPECIFICATIONS DISCLOSED HEREON ARE PROPRIETARY AND SHALL NOT BE REPRODUCED, NOR COPIED, NOR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.



BIRD

Electronic Corporation
Cleveland (Solon) Ohio USA

MATERIAL	APPROVALS		DATE	TITLE		
	DRAWN	D.M.RINK	11-8-02	F/ASSY, TERMINATION, N-TYPE MALE, 2W		
FINISH	CHECKED			SIZE	FSCM NO.	DWG. NO.
	APPROVED	MAV	1-10-03	A	70998	2-T-MN
			AUTOCAD	SCALE	2:1	COMM CODE LD1
				SHEET	1 OF 1	