



# The Neutron Series

## Distributed Network Management Solution

### Flexible, Scalable, Enterprise-Class Management for Networks Both Large and Small


Today's networks must be flexible, robust and as effective as the organizations they serve. Often comprised of different sizes, infrastructures and locations, these distributed networks can place an enormous burden on in-house IT personnel or managed service providers looking to manage, monitor and upgrade a potentially vast number of Access Points and Switches.

Fortunately, EnGenius has the answer: the Neutron Series Distributed Network Management Solution.

This highly flexible, scalable, fully integrated solution offers simplified configuration and management with enterprise-class performance, feature-rich Managed Access Points, WLAN Controller Switches and ezMaster™ Centralized Network Management, at an incredible price point – with NO AP licensing or tech support fees.

### The Neutron Series is ideal for deploying into:

- Managed Service Providers(MSPs)
- The Public Sector
- School Districts
- Large, Geographically Diverse Organizations
- Healthcare Facilities
- Hotels & Resorts

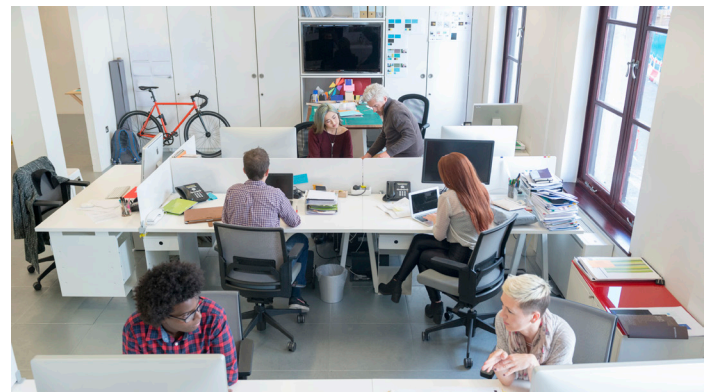

## The EnGenius® Neutron™ Series Distributed Network Management Solution includes

### Neutron Managed Access Points



### Neutron WLAN Controller Switches



### ezMaster™ Network Management Software:




### Features and Benefits

- CompleteScalability
  - Manage 1 – 1,000+ APs & Switches
  - 10,000+ Concurrent Users
  - Unlimited Number of Distributed Networks
- UnlimitedFlexibility
  - Operate Neutron APs Standalone or Managed
  - Locally Manage up to 50 APs per Switch
  - Manage Unlimited APs & Switches with ezMaster™
  - Deploy ezMaster via Cloud-Based\* Service, on a Remote or Local Server
- GreaterAffordability
  - NO AP Licensing, NO Technical Support Fees
  - Affordable Hardware
  - Save Time & Resources
  - Lower TCO per Deployment
- NeutronSeriesDistributedNetworkManagement
  - Centralized Management with ezMaster
  - Full Featured WLAN Controller Switches
  - Versatile Access Point Portfolio
- OptimizeWirelessPerformance
- CreateSecure,BrandedCaptivePortals
- SimplifiedDeployment&Provisioning
- ComprehensiveNetworkProtection
- RichReporting&Analytics
- Enterprise-ClassPerformance
- ComprehensivePre/PostSales&CustomerSupport

\*Feature available 2016


## Complete Scalability Regardless of Size

Want to start small or go big? You can do both with the Neutron Series. The Solution makes it easy to deploy and manage a few or 1,000+ APs, and Switches and 10,000+ concurrent users on an unlimited number of networks distributed across various cities, regions or countries, regardless of their size and infrastructure.

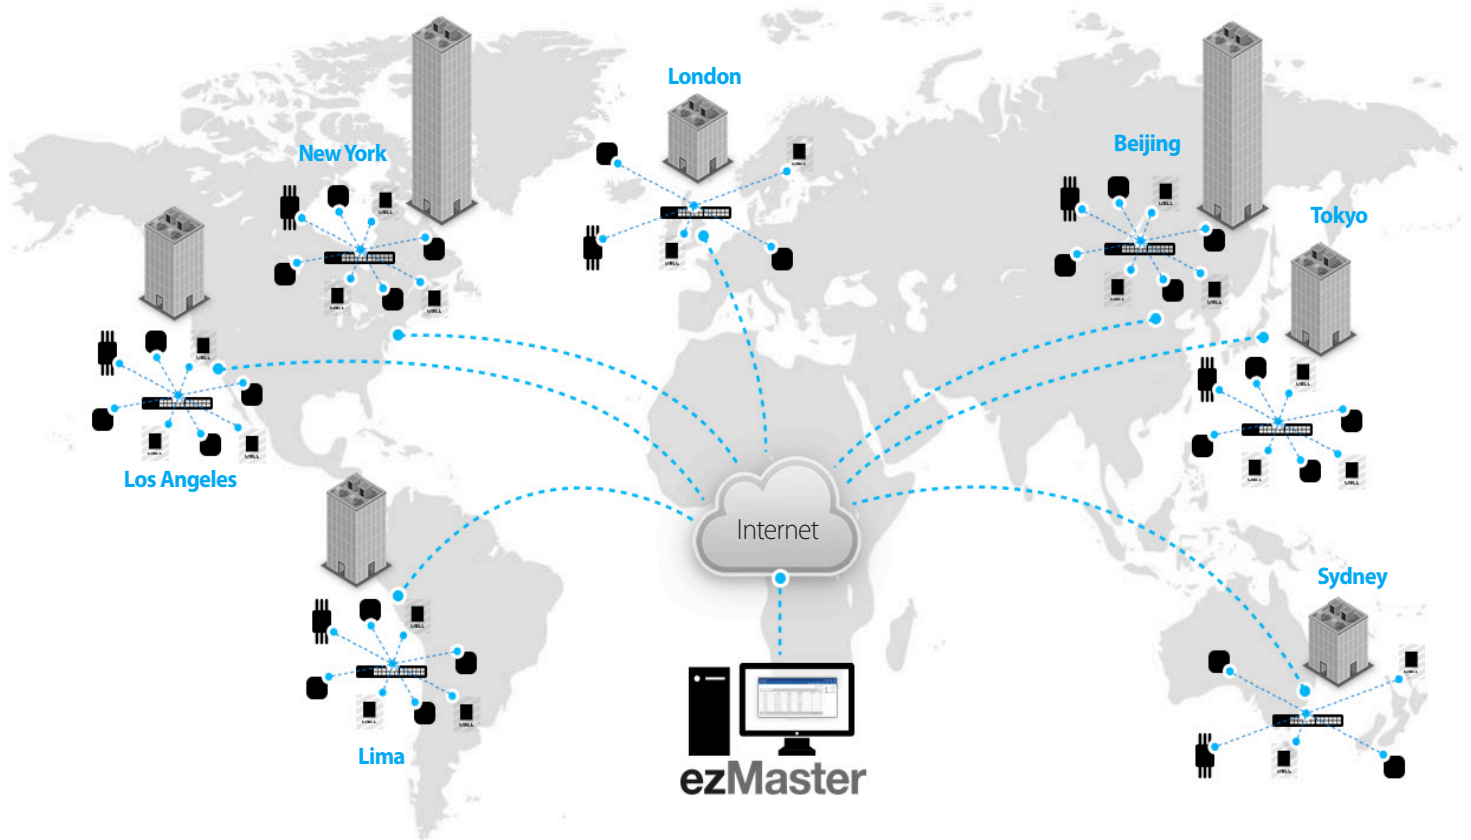

## Unlimited Flexibility

No matter what your business size, the Neutron Series is flexible enough to meet the needs of your network. Operate Neutron APs alone or manage up to 50 per Neutron Controller Switch; and centrally manage an unlimited number of APs and Switches via ezMaster locally, remotely or via the Cloud.

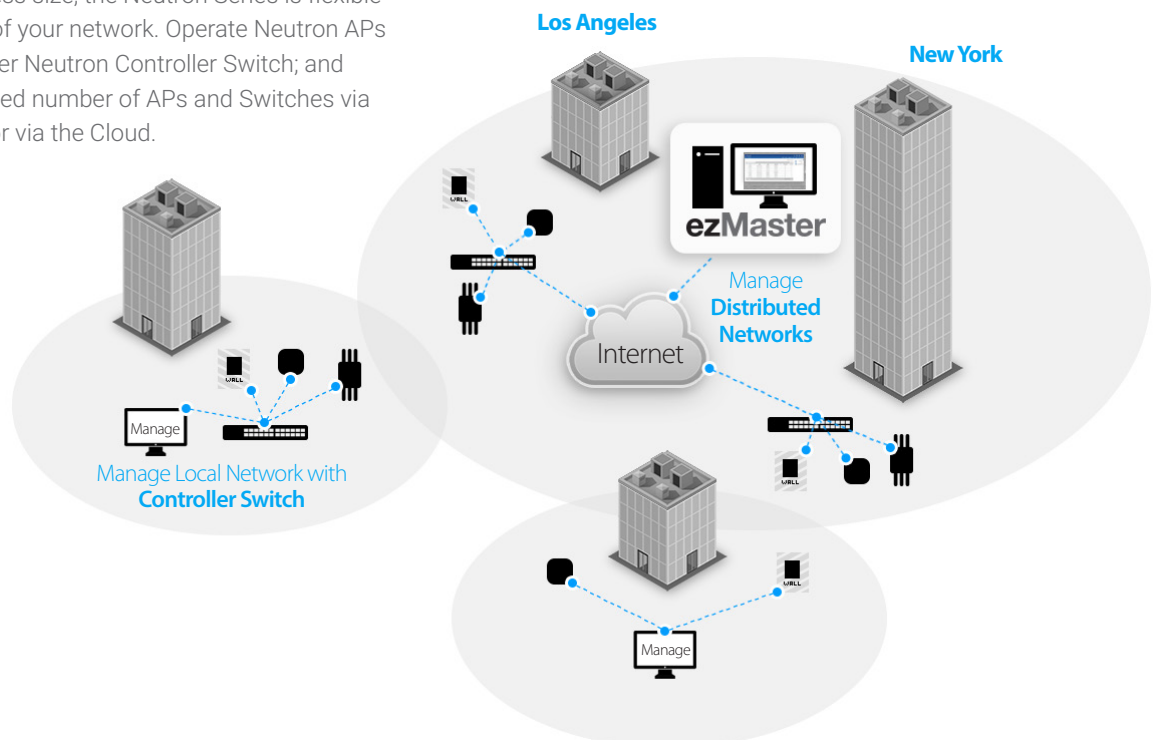

## Enjoy Lower Capital & Operating Expenses

Many competing solutions require costly hardware, per AP licensing, and tech support fees. Not with the Neutron Series.

Since it's also easy to deploy, manage and operate, you'll save valuable time and resources, all translating to affordable, predictable costs—and a lower TCO per deployment.

### The Price Paid Over One Year for 25 APs

Compare	EnGenius Hybrid Solution	Controller-based Vendor	Cloud-based Vendor
Access Points	11ac 3x3 : 3 Streams EWS360AP \$599	11ac 3x3 : 3 Streams \$795	11ac 3x3 : 3 Streams \$1,399
HW Controller	0	1	0
Subscription	0	0	\$3,750 per year
License	0	\$4,000	0
Firmware Upgrade	0	\$3,600	0
<b>Total Cost (USD)</b>	<b>\$14,975</b>	<b>\$27,475</b>	<b>\$38,725</b>

## Features & Benefits

The Neutron Series delivers enterprise-class features that simplify deployment and management, maximizing wireless performance for any size network, no matter where it's located.

### Optimized Wireless Performance

Continuously monitor the RF environment, including neighboring APs, with Background Scanning, and enable automatic control of AP transmission power and channel allocation ensuring optimized RF coverage and wireless performance. Configure multiple APs for Fast Roaming, securing seamless connectivity as mobile users move between Access Points.

Provide for maximum client performance as Band Steering automatically directs clients to the appropriate RF channel, while Band Balancing intelligently works to maintain a balanced number of clients per AP.

### Distributed Control, Centralized Management with ezMaster™

Centrally manage an unlimited number of independent distributed networks from a single, at-a-glance dashboard, no matter where they're located. Manage 1,000+ Neutron APs and Controller Switches and 10,000+ concurrent users.

EzMaster makes centralized network management easy through bulk configuration, provisioning and monitoring; rich analytics, reporting, and much more. Monitor APs with or without an onsite Controller Switch, and have the flexibility to deploy ezMaster on a local or remote server or via a Cloud-based service.

### Simplified Deployment & Provisioning

Save time and resources with Neutron Series' easy-to-use web interface, simplified management and one-click updates. Automated AP provisioning and intuitive configuration tools help streamline mass AP deployments. And since the Neutron Series is easy to deploy, manage and operate, with no extensive learning curve, you'll spend less on administrative overhead, travel costs and training.

## Neutron Controller Switches, A Full-Featured WLAN Platform

A powerful, full-featured platform capable of managing up to 50 Neutron APs each, Neutron Controller Switches offer redundant management between APs and ezMaster with SmartSync Redundancy\*; and future expandability for broader device connectivity and management. Neutron Switches also act as a wireless controller, giving IT administrators visibility into all connected Neutron devices and a full array of Layer 2 management tools.

## Versatile AP Portfolio Features High-Capacity 11ac

Neutron's versatile line of high-performance, managed, indoor ceiling-mount and outdoor ruggedized APs range from Single-Band 11n models to high-capacity 4x4 Dual-Band 11ac Wave 2 versions,

all featuring Power-over-Ethernet (PoE) convenience. For added versatility, Neutron APs can operate as a standalone device, be managed through a Neutron Controller Switch or centrally managed via ezMaster software.

## Create Secure, Branded Captive Portals

Organizations that offer Internet access to patrons or visitors – notably hotels, retail shops and restaurants – will appreciate Neutron's Captive Portal and Guest Network capabilities.

Establish a secure Guest Network that blocks access to main corporate computers and create separate Virtual LANs for increased security, network reliability and bandwidth conservation.



## Comprehensive Network Protection

With the Neutron Series, your network is protected from attacks at multiple levels through advanced wireless encryption standards such as Wi-Fi Protected Access Encryption and authentication database, 802.1X with RADIUS server. Network threats are quickly detected and avoided through rogue AP detection, email alerts and real-time wireless invasion monitoring, allowing for immediate action to divert network hacks and other security threats.

## Rich Reporting & Analytics


A wealth of invaluable reporting, analytics and real-time monitoring tools, with email alerts, give IT management instant insight into system efficiencies and issues. With tools like wireless client monitoring, and traffic and usage statistics, potential problems can be pinpointed and addressed before they effect users.

Neutron provides centralized network visibility in areas such as traffic flow, demand, network topology and more.

- Statistics View provides real-time and historical visibility of traffic flow.




- Topology View automatically maps network deployment and displays device relationships.

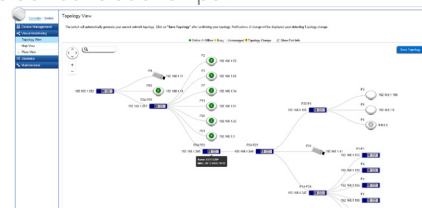

- Floor View allows administrators to upload floor plans and drop AP markers for a visual representation of any network on the system.



- With Google® Map View you can quickly drop AP markers and locate deployed APs across cities, regions or countries.

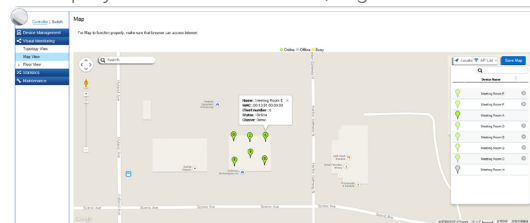

## Perfect Flexibility for Managed Service Providers

If you're a managed service provider (MSP) the EnGenius Neutron Series is ideal for you. Easily provision, configure, manage and update network devices for all of your customers – from a single console and login, regardless of network size, location, infrastructure or ISP. Saving you a tremendous amount of time, travel and cost.

## Flexible Distributed Network Management


EzMaster Network Management Software expands the flexibility and scalability of Neutron Series EWS Managed Access Points and Switches.

EzMaster allows organizations, such as branch offices and managed service providers, to easily and affordably deploy, monitor and manage a large number of Neutron APs, Controller Switches and Managed Smart Switches across geographically diverse properties. Centrally manage an unlimited number of independent distributed networks in the same subnet or cross-subnet from a single, at-a-glance network dashboard, no matter where they're located.

Deploy ezMaster locally, remotely or via a Cloud-based service with or without an onsite controller.

## Powerful, Scalable Options

EzMaster scales with your growing business needs. Manage 1,000+ Neutron EWS Access Points and Switches and 10,000+ concurrent users. Together, Neutron APs, Switches and ezMaster provide a flexible, fully integrated solution with redundancy support and future expandability for broader device connectivity.

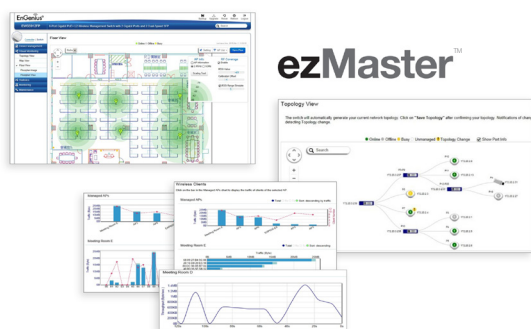

## System Requirements

### Recommended environment for managing up to 500 APs

CPU: Intel® Core™ i3 3.6 GHz dual-core or above  
RAM: 4 GB minimum  
HDD: 500 GB (actual requirement dependent on log size)  
OS: Microsoft® Windows® 7 or later + VMware® Player 7.0 or compatible virtualization software

### Recommended environment for managing up to 1,000+ APs

CPU: Intel® Core™ i5 3.2 GHz quad-core or above  
RAM: 4 GB minimum  
HDD: 500 GB (actual requirement dependent on log size)  
OS: Microsoft® Windows® 7 or later + VMware® Player 7.0 or compatible virtualization software

### Browser Requirements

Internet Explorer 10 or better  
Firefox 34.0 or better  
Chrome 31.0 or better  
Safari 8.0 or better

### Network Topology Requirements

At sites where APs are deployed: A DHCP-enabled network for APs to obtain an IP address

## Simplified Device Management

EzMaster Network Management Software makes centralized device management easy. How? Through centralized bulk configuration, provisioning and monitoring, a comprehensive at-a-glance network dashboard, rich analytics and reporting, and much more.

## ezMaster Software Features

- **Centralized Management**
  - Configure, Managed & Monitor 1,000+ Neutron Devices
  - Cross-Network AP Management
  - AP Group Configuration
- **Access Point Configuration & Management**
  - Auto Channel Selection
  - Auto Tx Power
  - Background Scanning
  - Band Steering (Auto Band Steering & Band Balancing)
  - Client Isolation
  - Client Limiting
  - Fast Roaming
  - L2 Isolation
  - LED On/Off Control
  - Multiple SSID
  - RSSI Threshold
  - Secure Guest Network
  - Traffic Shaping
  - VLAN Isolation
  - VLAN Tag
- **Comprehensive Monitoring**
  - Device Status Monitoring
  - Floor Plan View
  - Map View
  - Rogue AP Detection
  - System Status Monitoring
  - Visual Topology View
  - Wireless Client Monitoring
  - Wireless Coverage View
  - Wireless Traffic & Usage Statistics
- **Management & Maintenance**
  - Bulk Firmware Upgrade
  - Captive Portal
  - Email Alert
  - ezRedundancy (Available 2016)
  - Kick/Ban Clients
  - One-Click Update
  - Remote Logging
  - Seamless Migration
  - SmartSync Redundancy (Available 2016)
  - Syslog

## Complete Line of the Neutron Series Products

### Managed Access Points

Model	Description
EWS300AP	Single-Band 11n 2x2:2 2.4 GHz Ceiling-Mount Wireless Managed Indoor Access Point
EWS310AP	Dual-Band 11n 2x2:2 Ceiling-Mount Wireless Managed Indoor Access Point
EWS320AP	Dual-Band 11n 3x3:3 Ceiling-Mount Wireless Managed Indoor Access Point
EWS350AP	Dual-Band 11ac 2x2:2 Ceiling-Mount Wireless Managed Indoor Access Point
EWS360AP	Dual-Band 11ac 3x3:3 Ceiling-Mount Wireless Managed Indoor Access Point
EWS370AP	Dual-Band 11ac Wave 2 4x4:4 MU-MIMO Ceiling-Mount Wireless Managed Indoor Access Point
EWS371AP	Dual-Band 11ac Wave 2 4x4:4 MU-MIMO Wireless Managed Indoor Access Point – External Antennas
EWS500AP	Single-Band 11n 2x2:2 Wall Plate Wireless Managed Indoor Access Point / Switch
EWS510AP	Dual-Band 11n 2x2:2 Wall Plate Wireless Managed Indoor Access Point / Switch
EWS650AP	Dual-Band 11ac 2x2:2 Wireless Managed Outdoor Access Point
EWS660AP	Dual-Band 11ac 3x3:3 Wireless Managed Outdoor Access Point
EWS860AP	Dual-Band 11ac 3x3:3 Wireless Ruggedized Managed Outdoor Access Point
EWS870AP	Dual-Band 11ac Wave 2 4x4:4 MU-MIMO Wireless Managed Ruggedized Outdoor Access Point
EWS871AP	Dual-Band 11ac Wave 2 4x4:4 MU-MIMO Wireless Managed Ruggedized Outdoor Access Point – External Antennas

### WLAN Controller Switches

Model	Description
EWS2910P	8-Port GigE 61W PoE WLAN Controller/Switch – Manage up to 20 Access Points
EWS2910P-KIT-300	WLAN Starter Kit (1) 8-Port GigE 61W PoE WLAN Controller/Switch – Manage up to 20 APs; (2) EWS300AP Single-Band 11n 2x2:2, 2.4 GHz Ceiling-Mount Wireless Access Points
EWS5912FP	8-Port GigE 130W PoE+ WLAN Management Controller / Switch - Manage up to 50 Access Points
EWS7928P	24-Port GigE 185W PoE+ WLAN Management Controller / Switch - Manage up to 50 Access Points
EWS7928FP	24-Port GigE 370W PoE+ WLAN Management Controller / Switch - Manage up to 50 Access Points
EWS7952FP	48-Port GigE 740W PoE+ WLAN Management Controller / Switch - Manage up to 50 Access Points

## EnGenius Neutron Series Gigabit Managed PoE+ Switches



Models	EWS7952FP	EWS7928FP	EWS7928P	EWS5912FP	EWS2910P
10/100/1000 Base-T, POE+	48	24	24	8	8
10/100/1000 SFP Ports	4	4	4	2	2
RJ45 Console Port	•	•	•	•	-
Auto Uplink Gigabit Ports	-	-	-	•	-
Rackmount	19" 1U	19" 1U	19" 1U	13" 1U	9.45" (desktop)
Total PoE Budget	740W	370W	185W	130W	61.6W
PoE+ Capable Ports	1-48	1-24	1-24	1-8	1-8 (802.3af only)
Switching Capacity	104 Gbps	56 Gbps	56 Gbps	24 Gbps	20 Gbps
Forwarding Mode	Store-and-forward	Store-and-forward	Store-and-forward	Store-and-forward	Store-and-forward
MAC Address Table	8k	8k	8k	8k	8k
Packet Buffer Memory	1.5 MB	512 KB	512 KB	512 KB	512 KB
Power Source	100 to 240 VAC 50/60Hz	100 to 240 VAC 50/60Hz	100 to 240 VAC 50/60Hz	100 to 240 VAC 50/60Hz	100 to 240 VAC 50/60Hz
Full Load Power Consumption	885.23 Watts	452.06 Watts	235.3 Watts	152.8 Watts	79.4 Watts
Management	Wireless AP Controller, ezMaster Network Management Software, Web GUI, CLI, SNMP, RMON, HTTPS, Dual Image				
Wireless Controller Supports EWS APs	Up to 50	Up to 50	Up to 50	Up to 50	Up to 20
Advanced QoS with IPv4/IPv6 Multicast Filtering	IGMP and MLD Snooping				
Auto-VoIP	•	•	•	•	•
VLANs	Max 4094 Static Groups, Voice VLAN				
Network Standards	IEEE 802.3 Ethernet IEEE 802.3i 10Base-T Ethernet IEEE 802.3u 100Base-TX Fast Ethernet IEEE 802.3ab 1000Base-T Gigabit Ethernet IEEE 802.3x Full-Duplex Flow Control IEEE 802.3z Gigabit Ethernet 1000Base-SX/LX IEEE 802.3ad Link Aggregation (Trunking) IEEE 802.1D Spanning Tree Protocol (STP) IEEE 802.1w Rapid Spanning Tree Protocol (RSTP) IEEE 802.1s Multiple Spanning Tree Protocol (MSTP) IEEE 802.1Q VLAN Tagging IEEE 802.1ab Link Layer Discovery Protocol (LLDP) IEEE 802.1p Quality of Service IEEE 802.1X RADIUS Access Control IEEE 802.3az Energy Efficient Ethernet				

## A Full-Featured Platform

EnGenius Neutron Series Controller Switches are a powerful, full-feature platform capable of managing up to 50 Neutron Managed Access Points per Switch, while providing future expandability for broader device connectivity and redundant management between Neutron APs and ezMaster with SmartSync Redundancy.

Acting as a wireless network controller, Neutron Controller Switches give IT administrators visibility into all Neutron Series connected devices. This allows them to be grouped into clusters with the same settings and policies applied automatically.

Available in 8-, 24- and 48-port models, each Neutron Series Controller Switch supports Power-over-Ethernet (PoE), delivering up to 30 watts per port for powering devices like APs, IP Cameras, and VoIP (Voice-over-IP) phone systems. Neutron Controller Switches also provide improved network efficiency, security, and AP management through full Layer 2 management tools.

When combined with ezMaster, Neutron Controller Switches support SmartSync Redundancy, which stores network analytic data even when Internet connectivity is not available. Once connectivity is restored, the Controller Switch will automatically re-synch and send analytics to ezMaster, meanwhile, the network itself would remain running the entire time.

## Key Features

- Access Point Auto Discovery & Provisioning
- Access Point Auto IP-Assignment
- Access Point Cluster Management
- Visual Topology View
- Floor Plan & Map View
- Wireless Coverage Display
- Access Point Status Monitoring
- Wireless Client Monitoring
- Wireless Traffic & Usage Statistics
- Real-time Throughput Monitoring
- Bulk Firmware Upgrade Capability
- Remote Access Point Rebooting
- Fast Roaming
- Fast Handover
- Band Steering
- Traffic Shaping
- Intelligent Diagnostics
- Access Point Device Name Editing
- Access Point Radio Settings
- Access Point Client Limiting
- Wireless Security (WEP, WPA/WPA2 Enterprise, WPA/WPA2 PSK)

## Technical Specifications

### Network Ports

#### EWS2910P

8 x 10/100/1000 Mbps Ports in the front panel  
2 x 100/1000 Mbps SFP Slot

#### EWS5912FP

8 x 10/100/1000 Mbps Ports in the front panel  
2 x 100/1000 Mbps SFP Slot  
2 x Gigabit Uplink Ports

1 x RJ45 Console Port

#### EWS7928FP / EWS7928P

24 x 10/100/1000 Mbps Ports in the front panel  
4 x 100/1000 Mbps SFP Slot  
1 x RJ45 Console Port

#### EWS7952FP

48 x 10/100/1000 Mbps Ports in the front panel  
4 x 100/1000 Mbps SFP Slot  
1 x RJ45 Console Port

### Switching Capacity

EWS2910P: 20 Gbps

EWS5912FP: 24 Gbps

EWS7928P: 56 Gbps

EWS7928FP: 56 Gbps

EWS7952FP: 104 Gbps

### Forwarding Mode

Store and Forward

### SDRAM

256MB

### Flash Memory

32MB

### PoE Capability

#### EWS2910P

PoE Standard: Ports 1~8 Support IEEE 802.3af

#### EWS5912FP

PoE Standard: Ports 1~8 Support IEEE 802.3at/af

#### EWS7928FP / EWS7928P

PoE Standard: Ports 1~24 Support IEEE 802.3at/af

#### EWS7952FP

PoE Standard: Ports 1~48 Support IEEE802.3at/af

### PoE Capable Ports

**EWS2910P** Ports 1~8 Can Output Up to 15W

**EWS5912FP** Ports 1~8 Can Output Up to 30W

**EWS7928P** All Gigabit Ethernet Ports / Up to 30W

**EWS7928FP** All Gigabit Ethernet Ports / Up to 30W

**EWS7952FP** All Gigabit Ethernet Ports / Up to 30W

### LED Indicators

1 x Power LED

1 x Fault LED

1 x PoE Max LED

1 x LAN Mode LED

1 x PoE Mode LED

Copper Ports: LAN/PoE Mode, Link/Act

SFP Ports: Link/Act, Speed (EWS2910P & EWS7952FP only)

### Software Features

#### Layer 2 Features

802.3ad Link Aggregation

Port Mirroring

Port Trunking

Bandwidth Control

Spanning Tree Protocol

- 802.1D Spanning Tree (STP)

- 802.1w Rapid Spanning Tree (RSTP)

- 802.1s Multiple Spanning Tree (MSTP)

MAC Address Table

- 8K Entries

802.1ab Link Layer Discovery Protocol

## Technical Specifications continued

### Layer 2 Features continued

IGMP Snooping
- IGMP v1/v2/v3 Snooping
- Supports 4094 IGMP Groups
- IGMP per VLAN
- IGMP Snooping Querier
- IGMP Snooping Fast Leave
MLD Snooping
- MDL Snooping v1/v2
- Supports 4,094 MLD Groups
- MLD per VLAN
Jumbo Frame
- Up to 9,216 Bytes
VLAN

### QoS

802.1p Quality of Service
Queue Handling
- 802.1w Rapid Spanning Tree (RSTP)
- CoS-based on 802.1p Priority
- CoS-based on TOS
- CoS-based on DSCP
- CoS-based on Physical Port

### Security

802.1X
- Guest VLAN
- Port-Based Access Control
Supports RADIUS Authentication
Port Security
Storm Control

### Security continued

Port Isolation
DoS Attack Prevention
BPDU Attack Prevention
Access Control List (ACL)

### PoE Management

Power On/Off Per Port
Power Class Configuration
Power Feeding with Priority
User Defined Power Limit

802.3az Energy Efficient Ethernet
802.3x Flow Chart

### Management

SSH Server
Telnet Server
TFTP Client
TFTP Upgrade
HTTPs
BootP/DHCP Client
Web-based Support

### Management continued

SNMP v1 / v2c / v3 Support
Command Line Interface (CLI)
SNTP
RMONv1
SYSLOG
Port Statistics
Cable Diagnostics
Ping Test
Trace Route
MIB Support
- RFC1213 / RFC1493 / RFC1757 / RFC2674/ RFC2863
Configuration Restore/Backup
Email Alerts

### Wireless Management Features (with Neutron Series Access Points & ezMaster)

Access Point Auto Discovery and Provisioning
Access Point Auto IP Assignment
Access Point Group Management
Remote Access Point Rebooting
Access Point Device Name Editing
Access Point Radio Settings
Band Steering
Traffic Shaping
Fast Roaming (802.11k & 802.11r)
Pre-Authentication (802.11i & 802.11x)
PMK Caching (802.11i)
RSSI Threshold
Access Point Client Limiting
Client Fingerprinting
Wireless Security
(WEP, WPA/WPA2 Enterprise, WPA/WPA2 PSK)
Access Point VLAN Management
VLANs for Access Point- Multiple SSIDs
Secured Guest Network
Captive Portal
Access Point Status Monitoring
Rogue AP Detection
Wireless Client Monitoring
Background Scanning
Email Alert
Wireless Traffic & Usage Statistics
Real-Time Throughput Monitoring
SmartSync Redundancy
Visual Topology View
Floor Plan View
Map View
Wireless Coverage Display
Secure Control Messaging (SSL Certificate)
Local MAC Address Database
Remote MAC Address Database (RADIUS)
Unified Configuration Import / Export
Bulk Firmware Upgrade Capability

### Wireless Management Features (with Neutron Series Access Points & ezMaster) continued

One-Click Update
Intelligent Diagnostics
Kick/Ban Clients
Wi-Fi Scheduler

### Temperature Range

<b>EWS2910P</b>
Operating: 32°F to 104°F (0°C to 40°C)
Storage Temperature: -40°F to 158°F (-40°C to 70°C)
<b>EWS5912FP / EWS7928P / EWS7928FP / EWS7952FP</b>
Operating: 32°F to 122°F (0°C to 50°C)
Storage Temperature: -40°F to 158°F (-40°C to 70°C)

### Humidity (non-condensing)

Operating: 5% - 95%
---------------------

### Device Dimensions and Weights

<b>EWS2910P</b>
Weight: 1.36 lbs. (620 g)
Width: 9.45" (240 mm)
Length: 4.13" (105 mm)
Height: 1.06" (27 mm)
<b>EWS5912FP</b>
Weight: 4.4 lbs. (1.9 kg)
Width: 13.00" (330.20 mm)
Length: 9" (228.60 mm)
Height: 1.73" (43.94 mm)
<b>EWS7928P</b>
Weight: 7.82 lbs. (3.5 kg)
Width: 17.3" (439 mm)
Length: 10.24" (260 mm)
Height: 1.73" (44 mm)
<b>EWS7928FP</b>
Weight: 10.36 lbs. (4.7 kg)
Width: 17.3" (439 mm)
Length: 12.2" (310 mm)
Height: 1.73" (44 mm)
<b>EWS7952FP</b>
Weight: 14.15 lbs. (6.4 kg)
Width: 17.32" (439.9 mm)
Length: 16.14" (409.9 mm)
Height: 1.73" (43.9 mm)

## Technical Specifications continued

---

### Package Contents

---

1x EWS Gigabit Managed PoE+ Switch

---

1x Quick Installation Guide

---

### EWS2910P

---

1x Power Adapter

---

1x Power Cord

---

1x Wall Mount Kit

---

1x Ground Screw Set

---

**EWS5912FP / EWS7928P / EWS7928FP /**

---

### **EWS7952FP**

---

1x Power Cord

---

1x RJ45 Console Cable

---

1x Rack Mount Kit

---

### Certifications

---

FCC, IC, CE

---

### Warranty

---

1-Year Standard

---

## EnGenius Neutron Series Indoor Managed Access Points



	CEILING-MOUNT					WALL PLATE		
Models	EWS371AP	EWS370AP	EWS360AP	EWS350AP	EWS310AP	EWS300AP	EWS510AP	EWS500AP
Standards	802.11a/b/g/n/ac	802.11a/b/g/n/ac	802.11a/b/g/n/ac	802.11a/b/g/n/ac	802.11a/b/g/n	802.11b/g/n	802.11a/b/g/n	802.11b/g/n
Frequency	2.4 & 5 GHz	2.4 & 5 GHz	2.4 & 5 GHz	2.4 & 5 GHz	2.4 & 5 GHz	2.4 GHz	2.4 & 5 GHz	2.4 GHz
2.4 GHz Max. Data Rate	800 Mbps	800 Mbps	450 Mbps	300 Mbps	300 Mbps	300 Mbps	300 Mbps	300 Mbps
5 GHz Max. Data Rate	1,733 Mbps	1,733 Mbps	1,300 Mbps	867 Mbps	300 Mbps	N/A	300 Mbps	N/A
Radio Chains/Streams	4 x 4:4	4 x 4:4	3 x 3:3	2 x 2:2	2 x 2:2	2 x 2:2	2 x 2:2	2 x 2:2
RF Output Power (2.4 GHz)	27 dBm	27 dBm	28 dBm	26 dBm	29 dBm	29 dBm	20 dBm	20 dBm
RF Output Power (5 GHz)	27 dBm	27 dBm	28 dBm	26 dBm	26 dBm	N/A	20 dBm	N/A
Ethernet Ports	2 x Gig Port (PoE+)	2 x Gig Port (PoE+)	1 x Gig Port (PoE+)	1 x Gig Port (PoE+)	1 x Gig Port (PoE)	1 x Gig Port (PoE)	- 1 x 10/100 Mbps Access Port (PoE+) - 3 x 10/100 Mbps Access Ports - 1 x Gig Uplink Port (PoE) - 1 x RJ45 Pass Through Ports	- 1 x 10/100 Mbps Access Port (PoE+) - 3 x 10/100 Mbps Access Ports - 1 x Gig Uplink Port (PoE) - 2 x RJ45 Pass Through Ports
110 Punch Down Block	-	-	-	-	-	-	1	1
Power-over-Ethernet	802.3at	802.3at	802.3at	802.3at	802.3af/at	802.3af/at	802.3af/at	802.3af/at
Power Consumption (Peak)	21W	21W	22.8W	18W	15.6W	9.6W	10.8W	7.5W
Integrated Antenna	-	4 x 3 dBi (2.4 GHz) 4 x 3 dBi (5 GHz)	6 x 5 dBi	4 x 5 dBi	4 x 5 dBi	2 x 5 dBi	2 x 4 dBi (2.4 GHz) 2 x 5 dBi (5 GHz)	2 x 4 dBi
External Antenna	8 x 3 dBi (RP-SMA)	-	-	-	-	-	-	-

## Neutron Series Managed Access Points

### Versatile Portfolio of Managed Access Points

EnGenius offers one of the broadest Access Point portfolios available. The Neutron Series' versatile line of high-performance, managed indoor and outdoor APs range from **affordable, Single-Band 11n models** to **high-capacity 4x4 Dual-Band 11ac Wave 2 versions**, all with Power-over-Ethernet (PoE) convenience.

Neutron Access Points include sleek, low profile, **Indoor Ceiling-Mount APs and Wall Plate AP/Switches** that provide an all-in-one communications hub for hotel guest rooms, and multi-tenant dwellings to powerful, slim line, **IP-rated Outdoor and industrial, ruggedized APs** that extend the network beyond. Neutron Managed APs are sure to meet a variety of application needs for both large and small networks alike.

For added versatility, **deploy as a standalone Access Point or part of a scalable Neutron Solution** managed via a Neutron Controller Switch or centrally managed with ezMaster software.

### Key Features

- 11ac Wave 2 4x4 Models
- Beamforming Technology
- Sectorized 3D Antenna (selected models)
- Dynamic Channel Optimization
- Dual-Band (selected models)
- Band Steering (Dual-Band models)
- Seamless Roaming, Fast Handover
- Supports Connectivity of 100+ Users
- 16 SSIDs (8 SSIDs per frequency band)
- Wireless Traffic Shaping
- QoS
- SSID-to-VLAN Mapping
- Email Alert
- Wi-Fi Scheduler
- Auto-Reboot
- AP Detection

## Technical Specifications

### Frequency

**EWS310AP / EWS350AP / EWS360AP / EWS370AP / EWS371AP / EWS510AP**

2.4 and 5 GHz Frequency Bands

**EWS300AP / EWS500AP**

2.4 GHz Frequency Band

### Standards

**EWS300AP / EWS500AP**

IEEE 802.11b/g/n

**EWS310AP / EWS510AP**

IEEE 802.11a/b/g/n

**EWS350AP / EWS360AP / EWS370AP / EWS371AP**

IEEE 802.11a/b/g/n/ac

### Radio I

11b/g/n: 2.412~2.484 GHz

### Radio II (Dual-Band models only)

11a/n/ac: 5.18-5.24 & 5.26-5.32 & 5.5-5.7 & 5.745-5.825 GHz

### Data Rates

**EWS300AP / EWS500AP**

Up to 300 Mbps on the 2.4 GHz frequency band

**EWS310AP / EWS510AP**

Up to 300 Mbps on both frequency bands

**EWS350AP**

Up to 300 Mbps on the 2.4 GHz frequency band; Up to 867 Mbps on the 5 GHz band

**EWS360AP**

Up to 450 Mbps on the 2.4 GHz frequency band; Up to 1300 Mbps on the 5 GHz band

**EWS370AP / EWS371AP**

Up to 2.5 Mbps; Up to 800 Mbps on the 2.4 GHz band; Up to 1,733 Mbps on the 5 GHz band

### Memory

**EWS300AP** 64MB

**EWS310AP / EWS350AP / EWS360AP / EWS500AP / EWS510AP** 128MB

### Flash Memory

16MB

### Power Consumption

**EWS300AP** Up to 9.6W

**EWS310AP** Up to 15.6W

**EWS350AP** Up to 18W

**EWS360AP** Up to 22.8W

**EWS370AP** Up to 21W

**EWS371AP** Up to 21W

**EWS500AP** Up to 7.5W

**EWS510AP** Up to 10.8W

### Antennas

**EWS300AP**

2 x 5 dBi Internal High Gain Antennas

**EWS310AP / EWS350AP**

2 x 5 dBi 2.4 GHz Internal Antennas

2 x 5 dBi 5 GHz Internal Antennas

**EWS360AP**

3 x 5 dBi 2.4 GHz Internal Antennas

3 x 5 dBi 5 GHz Internal Antennas

**EWS370AP**

4 x 3 dBi (RP-SMA) 2.4 GHz Internal Antennas

4 x 3 dBi (RP-SMA) 5 GHz Internal Antennas

**EWS371AP**

4 x 3 dBi 2.4 GHz Detachable Antennas

4 x 3 dBi 5 GHz Detachable Antennas

**EWS500AP**

2 x 4 dBi Internal Antennas

**EWS510AP**

2 x 4 dBi 2.4 GHz Internal Antennas

2 x 5 dBi 5 GHz Internal Antennas

### Physical Interface

1 x RJ45 Gigabit Ethernet 10/100/1000 – PoE Capable

1 x Reset Button, 1 x Power Connector

**EWS370AP / EWS371AP**

1 x Power

2 x WLAN

1 x LAN 2.4 GHz

1 x LAN 5 GHz

2 x RJ45 10/100/1000 Gigabit Ethernet Ports (Link Aggregation Achieves 2 Gbps Throughput)

- LAN1: 802.3at PoE Input

- LAN2: Pass Through Port

1 x Reset Button

1 x DC Power Connector

**EWS500AP / EWS510AP**

1 x 10/100/1000 Mbps Uplink Port with 802.3af/at PoE

1 x 10/100 Mbps Access Port with PoE Output (support 802.3af output when PoE input is 802.3at)

2 x RJ45 Pass Through Ports

1 x 110 Punch Down Block

1 x DC Power Connector

1 x Reset Button

### LED Indicators

**EWS300AP**

1 x Power

1 x WLAN

1 x LAN

1 x 2.4 GHz

**EWS310AP / EWS350AP / EWS360AP**

1 x Power

1 x WLAN (Wireless Connection)

### LED Indicators continued

**EWS310AP / EWS350AP / EWS360AP**

1 x LAN

1 x 2.4 GHz

1 x 5 GHz

**EWS500AP / EWS510AP**

1 x Power

1 x WAN

1 x 2.4 GHz

1 x 5 GHz (EWS510AP only)

1 x LAN 1-4

### Power Requirements

Power Supply: 100 to 240 VDC  $\pm$  10%, 50/60 Hz (depends on different countries)

Active Ethernet (Power-over-Ethernet, IEEE 802.3at/af)

**EWS300AP** Power-over-Ethernet, IEEE 802.3af

**EWS310AP / WS350AP / EWS360AP / EWS370AP / EWS371AP** 12V/2A

**EWS500AP / EWS510AP** 48V/0.8A

### Modulations

OFDM: BPSK, QPSK, 26-QAM (EWS300AP) 16-QAM, 64-QAM, 256-QAM (EWS371AP/EWS370AP) DBPSK, DQPSK, CCK

### Radio Technologies

802.11b: Direct-Sequence Spread Spectrum (DSSS)

802.11a/g/n/ac: Orthogonal Frequency Division Multiplexing (OFDM)

### Operating Channels

2.4 GHz US/Canada 1-11

5 GHz (Dual-Band models only): Country dependent for the following ranges:

36, 40, 44, 48, 52, 56, 60, 64, 100, 104, 108, 112, 116, 120, 124, 128, 132, 136, 140, 149, 153, 157, 161, 165

### Operation Modes

Access Point

### Multiple BSSID

Supports up to 8 SSIDs Per Radio

### SSID-to-VLAN Tagging

Supports 802.1q SSID-to-VLAN Tagging

### Spanning Tree

Supports 802.1d Spanning Tree Protocol

## Technical Specifications continued

### Wireless

#### EWS300AP / EWS500AP

Wireless Mode: 11b/11g/11n

#### EWS310AP / EWS510AP

Wireless Mode: 11a/11b/11g/11n

#### EWS350AP / EWS360AP / EWS370AP / EWS371AP

Wireless Mode: 11a/11b/11g/11n/11ac

Channel Selection (settings vary by country)

#### All EWS 11ac APs

Channel Bandwidth (Auto, 20 MHz, 40 MHz, 80 MHz)

#### EWS300AP

Channel Bandwidth (Auto, 20 MHz, 40 MHz)

### Transmission Rate

2.4 GHz 11n only, 11b/b/n mix, 11b only, 11b/g, 11g only

5 GHz (Dual-Band models only): 11ac only, 11n only, 11a/n mix, 11a only

#### EWS370AP / EWS371AP

Tx Beamforming (Tx BF)

#### EWS370AP / EWS371AP

#### SU-MIMO

(4) Spatial Streams to 1733 Mbps to Single Client

#### EWS370AP / EWS371AP

#### MU-MIMO

(3) Spatial Streams to 1300 Mbps to (3) MU-MIMO-Capable Devices Simultaneously

### Wireless Management Features (with ezMaster & Neutron Switch)

Access Point Auto Discovery and Provisioning

Access Point Auto IP Assignment

Access Point Group Management

Remote Access Point Rebooting

Access Point Device Name Editing

Access Point Radio Settings

Band Steering (Dual-Band models only)

Traffic Shaping

Fast Roaming (802.11k & 802.11r)

Pre-Authentication (802.11i & 802.11x)

PMK Caching (802.11i)

RSSI Threshold

Access Point Client Limiting

Client Fingerprinting

Wireless Security (WEP, WPA/WPA2 Enterprise, WPA/WPA2 PSK)

AP VLAN Management

VLANs for Access Point- Multiple SSIDs

Secured Guest Network

Captive Portal

Access Point Status Monitoring

Rogue AP Detection

### Wireless Management Features (with ezMaster & Neutron Switch) continued

Wireless Client Monitoring

Background Scanning

Email Alert

Wireless Traffic & Usage Statistics

Real-Time Throughput Monitoring

SmartSync Redundancy

Visual Topology View

Floor Plan View

Map View

Wireless Coverage Display

Secure Control Messaging (SSL Certificate)

Local MAC Address Database

Remote MAC Address Database (RADIUS)

Unified Configuration Import / Export

Bulk Firmware Upgrade Capability

One-Click Update

Intelligent Diagnostics

Kick/Ban Clients

Wi-Fi Scheduler

### Tx Power Control

Adjust Transmit Power by dBm

### Configuration

Web-based Configuration (http)

### Firmware Upgrade

Via Web Browser

### Administrator Settings

Administrator Username and Password Change

### MIB

MIB I, MIB II (RFC1213) and private MIB

### System Monitoring

Status Statistic and Event Log

### SNMP

V1 / V2c / V3

### Traffic Shaping

Incoming and Outgoing Wireless Traffic Shaping

### Reset Settings

Reboot (press and hold for 2 seconds).  
Reset to Factory Default (press and hold for 10 seconds)

### Auto-Channel Selection

Automatically Selecting Least Congested Channel

### Bandwidth Measurement

IP Range and Bandwidth Management

### Schedule Reboot

Reboot Access Point by Minute, Hour, Day, or Week

### Backup and Restore

Save and Restore Settings via Web Interface

### CLI

Supports Command Line Interface

### Diagnosis

IP Pinging Statistics

### Log

SysLog and Local Log Support

### LED Control

On/Off

### AP Detection

Scanning for Available EnGenius APs

### Wireless Security

WPA/WPA2 Personal (WPA-PSK using TKIP or AES)

WPA/WPA2 Enterprise (WPA-EAP using TKIP)

802.1X RADIUS Authenticator: MD5/TLS/TTLS, PEAP

SSID Broadcast Enable/Disable

MAC Address Filtering, Up to 50 Entries

L2 Isolation

#### EWS370AP / EWS371AP

WEP Encryption 64/128/152 bit

### QoS (Quality of Service)

IEEE 802.11e

WMM (Wireless Multimedia)

### Temperature Range

Operating: 32°F to 104°F (0°C to 40°C)

Storage Temperature: -4°F to 140°F (-20°C to 60°C)

### Humidity (non-condensing)

Operating: 90% or less

Operating: 90% or less

### Physical Security

Kensington Security Slot (N/A for EWS500AP/EWS510AP)

## Technical Specifications continued

---

### Device Dimensions and Weights

---

#### EWS300AP

Weight: 0.45 lbs. (204.1 g)

Length: 5.07" (128.7 mm)

Width: 5.07" (128.7 mm)

Height: 1.73" (43.9 mm)

#### EWS310AP

Weight: 0.80 lbs. (362.8 g)

Length: 6.36" (161.5 mm)

Width: 6.36" (161.5 mm)

Height: 1.64" (41.6 mm)

#### EWS350AP / EWS360AP

Weight: 0.80 lbs. (362.8 g)

Length: 6.5" (165.1 mm)

Width: 6.5" (165.1 mm)

Height: 1.64" (41.6 mm)

#### EWS370AP / EWS371AP

Weight: 3.7 lbs. (1.67 kg)

Length: 8.46" (215 mm)

Width: 8.46" (215 mm)

Height: 2.2" (55.8 mm)

#### EWS500AP / EWS510AP

Weight: 0.65 lbs. (296 g)

Length: 1.45" (37 mm)

Width: 4.33" (110 mm)

Height: 5.19" (130 mm)

---

---

### Package Contents

---

#### EWS300AP

Power Adapter (12V/1A)

T-Rail Mounting Kits

Ceiling and Wall Mount Screw Kits

Mounting Brackets

Quick Installation Guide

#### EWS310AP / EWS350AP / EWS360AP

RJ45 Ethernet Cable

#### EWS370AP / EWS371AP

Power Adapter (12V/2A)

#### EWS371AP

8 x Detachable RP-SMA Antennas

#### EWS500AP / EWS510AP

Power Adapter (48VDC/0.8A)

Mounting Bracket

Bracket Screws

Quick Installation Guide

---

### Certifications

---

FCC, IC, CE

---


### Warranty

---

1-Year Standard

---

## EnGenius Neutron Series Outdoor Managed Access Points

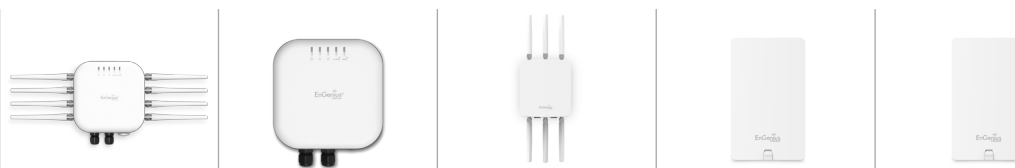

Models	EWS871AP	EWS870AP	EWS860AP	EWS660AP	EWS650AP
Standards	802.11b/g/n/ac	802.11b/g/n/ac	802.11a/b/g/n/ac	802.11a/b/g/n/ac	802.11b/g/n/ac
Frequency	2.4 & 5 GHz	2.4 & 5 GHz	2.4 & 5 GHz	2.4 & 5 GHz	2.4 & 5 GHz
2.4 GHz Max. Data Rate	800 Mbps	800 Mbps	450 Mbps	450 Mbps	300 Mbps
5 GHz Max. Data Rate	1,733 Mbps	1,733 Mbps	1,300 Mbps	1,300 Mbps	867 Mbps
Radio Chains/Streams	4 x 4:4	4 x 4:4	3 x 3:3	3 x 3:3	2 x 2:2
RF Output Power	27 dBm	27 dBm	29 dBm	29 dBm	27 dBm
Ingress Protection Rating	67	67	68	55	55
Primary Ethernet Port	1 x Gig Port	1 x Gig Port	1 x Gig Port	1 x Gig Port	1 x Gig Port
Secondary Ethernet Port	1 x Gig Port (PoE Output)	1 x Gig Port (PoE Output)	1 x Gig Port (PoE Output)	1 x Gig Port	1 x Gig Port
Console Interface	1 x RJ45	1 x RJ45	N/A	N/A	N/A
PoE Compliant	802.3at (PoE+)	802.3at (PoE+)	802.3at (PoE+)	802.3at (PoE+)	802.3at (PoE+)
Power Consumption (Peak)	21W (w/o PSE) 36W (w/PSE over LAN2)	21W (w/o PSE) 36W (w/PSE over LAN2)	32W	20W	20W
Integrated Antennas	-	4 x 3 dBi (2.4 GHz) 4 x 3 dBi (5 GHz)	N/A	6 x 5 dBi	2 x 5 dBi
External Antenna (N-Type)	4 x 5 dBi (2.4 GHz) 4 x 7 dBi (5 GHz)	N/A	2.4 GHz: 3 x 5 dBi 5 GHz: 3 x 7 dBi	N/A	N/A

## Technical Specifications

### Frequency

RF: 2.4 and 5 GHz Frequency Bands

### Standards

IEEE 802.11a/b/g/n/ac

### Radio I

11b/g/n: 2.412~2.484 GHz

### Radio II

11a/n/ac: 5.18-5.24 and 5.26-5.32 and 5.5-5.7 and 5.745-5.825 GHz

### Data Rates

#### EWS650AP

Up to 300 Mbps on 2.4 GHz; up to 867 Mbps on 5 GHz

#### EWS660AP / EWS860AP

Up to 450 Mbps on 2.4 GHz; up to 1300 Mbps on 5 GHz

#### EWS870AP / EWS871AP

Up to 2.5 GHz; Up to 800 Mbps on 2.4 GHz; up to 1733 Mbps on 5 GHz

### Memory

256MB

### Flash Memory

16MB

### Power Consumption

**EWS650AP** Up to 23W

**EWS660AP** Up to 23W

**EWS860AP** Up to 34W

**EWS870AP / EWS871AP** Up to 21W (without PSE);

Up to 36W (with PSE over LAN 2)

**EWS871AP** Up to 21W (without PSE)

### Antennas

#### EWS650AP / EWS660AP

Internal High Gain Antennas 5 dBi support both 2.4 GHz and 5 GHz (2) EWS350AP (6) EWS660AP

#### EWS860AP

External High Gain Antennas 3 x 5 dBi for 2.4 GHz

External High Gain Antennas 3 x 7 dBi for 5 GHz

### Antennas continued

#### EWS870AP

Internal High Gain Antennas 3 dBi support both 2.4 GHz and 5 GHz (4/Band)

#### EWS871AP

External High Gain N-Type Antennas 4 x 5 dBi for 2.4 GHz

External High Gain N-Type Antennas 4 x 7 dBi for 5 GHz

### Physical Interface

2 x RJ45 10/100/1000 Gigabit Ethernet Ports - PoE Capable 802.3at

1 x Reset Button

1 x Power Connector

#### EWS870AP / EWS871AP

2 x RJ45 10/100/1000 Gigabit Ethernet Ports

(Link Aggregation achieves 2Gbps Throughput)

- LAN1: Supports 802.3at PoE Input

- LAN2: Data & 802.3af PoE Pass-Through

1 x Console Ethernet Port

1 x Reset Button

1 x Power Connector

## Technical Specifications continued

### LED Indicators

1 x Power  
1 x 2.4 GHz  
1 x 5 GHz  
1 x WLAN (Wireless Connection)  
1 x LAN

### EWS870AP / EWS871AP

1 x Power  
2 x WLAN (Wireless Connection)  
2 x LAN (2.4GHz & 5GHz)

### Power Requirements

Power Supply: 100 to 240V DC +/-10% 50/60 Hz  
Active Ethernet (Power-over-Ethernet IEEE 802.3at)  
PoE Injector DC IN, 48V/0.8A

### EWS870AP / EWS871AP

DC IN, 48 V/1.25A  
802.3at/48V-54V Input Compliant Source  
Active Ethernet (PoE)

### PSE Output

#### EWS870AP / EWS871AP

LAN2 802.3af power source w/ included power adapter

### Surge Protection

#### EWS870AP / EWS871AP

4KV

### ESD Protection

#### EWS870AP / EWS871AP

Contact: 6KV  
Air: 8 KV

### Modulations

OFDM: BPSK, QPSK, 16-QAM, 26-QAM, 64-QAM, 256-QAM, DBPSK, DQPSK, CCK

### Radio Technologies

802.11b: Direct-Sequence Spread Spectrum (DSSS)

802.11a/g/n/ac: Orthogonal Frequency Division Multiplexing (OFDM)

### Operating Channels

2.4 GHz US/Canada 1-11

5 GHz Country dependent for the following ranges:  
36, 40, 44, 48, 52, 56, 60, 64, 100, 104, 108, 112, 116, 120, 124, 128, 132, 136, 140, 149, 153, 157, 161, 165

### Operation Modes

Access Point

### Multiple BSSID

Supports Up to 8 SSIDs Per Radio

### SSID-to-VLAN Tagging

Supports 802.1q SSID-to-VLAN Tagging

### Spanning Tree

Supports 802.1d Spanning Tree Protocol

### Wireless

Wireless Mode: 11a/11b/11g/11n/11ac  
Channel Selection (settings vary by country)  
Channel Bandwidth (Auto, 20 MHz, 40 MHz, 80 MHz)

### Transmission Rate

2.4 GHz 11n only, 11b/b/n mix, 11b only, 11b/g, 11g only  
5 GHz 11ac only, 11n only, 11a/n mix, 11a only

### EWS870AP / EWS871AP

Tx Beamforming (Tx BF)

### EWS870AP / EWS871AP

#### SU-MIMO

(4) Spatial Streams to 1733 Mbps to Single Client

### EWS870AP / EWS871AP

#### MU-MIMO

(3) Spatial Streams to 1300 Mbps to (3) MU-MIMO-Capable Devices Simultaneously

### Wireless Management Features (with ezMaster & Neutron Switch)

Access Point Auto Discovery and Provisioning

Access Point Auto IP Assignment

Access Point Group Management

Remote Access Point Rebooting

Access Point Device Name Editing

Access Point Radio Settings

Band Steering

Traffic Shaping

Fast Roaming (802.11k & 802.11r)

Pre-Authentication (802.11i & 802.11x)

PMK Caching (802.11i)

RSSI Threshold

Access Point Client Limiting

Client Fingerprinting

Wireless Security (WEP, WPA/WPA2 Enterprise,

WPA/WPA2 PSK)

AP VLAN Management

VLANs for Access Point- Multiple SSIDs

Secured Guest Network

Captive Portal

Access Point Status Monitoring

Rogue AP Detection

Wireless Client Monitoring

Background Scanning

## Key Features

- 11ac Wave 2 4x4 Models
- Beamforming Technology
- Tough IP68- and IP55-Rated Housing
- Sectorized 3D Antennas
- Dynamic Channel Optimization
- Dual-Band (selected models)
- Band Steering (Dual-Band models)
- Fast Roaming
- Supports Connectivity of 100+ Users
- 16 SSIDs (8 SSIDs per frequency band)
- Wireless Traffic Shaping
- QoS
- SSID-to-VLAN Mapping
- Email Alert
- Wi-Fi Scheduler
- Auto-Reboot
- AP Detection

### Wireless Management Features (with ezMaster & Neutron Switch) continued

Email Alert

Wireless Traffic & Usage Statistics

Real-Time Throughput Monitoring

SmartSync Redundancy

Visual Topology View

Floor Plan View

Map View

Wireless Coverage Display

Secure Control Messaging (SSL Certificate)

Local MAC Address Database

Remote MAC Address Database (RADIUS)

Unified Configuration Import / Export

Bulk Firmware Upgrade Capability

One-Click Update

Intelligent Diagnostics

Kick/Ban Clients

Wi-Fi Scheduler

### Tx Power Control

Adjust Transmit Power by dBm

### Configuration

Web-Based Configuration (http)

### Firmware Upgrade

Via Web Browser

### Administrator Settings

Administrator Username and Password Change

## Technical Specifications continued

<b>MIB</b>
MIB I, MIB II (RFC1213) and private MIB
<b>System Monitoring</b>
Status Statistic and Event Log
<b>SNMP</b>
V1 / V2c / V3
<b>Traffic Shaping</b>
Incoming and Outgoing Wireless Traffic Shaping
<b>Reset Settings</b>
Reboot (press & hold for 2 seconds).
Reset to Factory Default (press & hold for 10 seconds)
<b>Auto-Channel Selection</b>
Automatically Selecting Least Congested Channel
<b>Bandwidth Measurement</b>
IP Range and Bandwidth Management
<b>Schedule Reboot</b>
Reboot Access Point by Minute, Hour, Day, or Week
<b>Backup and Restore</b>
Save and Restore Settings via Web Interface
<b>CLI</b>
Supports Command Line Interface
<b>Diagnosis</b>
IP Pinging Statistics
<b>Log</b>
SysLog and Local Log Support
<b>LED Control</b>
On/Off
<b>AP Detection</b>
Scanning for Available EnGenius APs

<b>Wireless Security</b>
WPA/WPA2 Personal (WPA-PSK using TKIP or AES)
WPA/WPA2 Enterprise (WPA-EAP using TKIP)
802.1X RADIUS Authenticator: MD5/TLS/TTLS, PEAP
SSID Broadcast Enable/Disable
MAC Address Filtering, Up to 50 Entries
L2 Isolation
<b>EWS870AP / EWS871AP</b>
WEP Encryption 64/128/152 bit
<b>QoS (Quality of Service)</b>
IEEE 802.11e
WMM (Wireless Multimedia)
<b>Temperature Range</b>
<b>EWS650AP / EWS660AP</b>
Operating: -4°F to 140°F (-20°C to 60°C)
Storage: -22°F to 176°F (-30°C to 80°C)
<b>EWS860AP / EWS870AP / EWS871AP</b>
Operating: -4°F to 158°F (-20°C to 70°C)
<b>Humidity (non-condensing)</b>
Operating: 90% or less
Storage: 90% or less
<b>Weatherproof</b>
<b>EWS650AP</b> IP55-Rated Enclosure
<b>EWS660AP</b> IP55-Rated Enclosure
<b>EWS860AP</b> IP68-Rated Enclosure
<b>EWS870AP / EWS871AP</b> IP67-Rated Enclosure
<b>Device Dimensions and Weights</b>
<b>EWS650AP / EWS660AP</b>
Weight: 1.89 lbs. (857.2 g)
Length: 11.97" (304 mm)
Width: 7.13" (181.1 mm)
Height: 1.81" (45.9 mm)
<b>EWS860AP</b>
Weight: 4.17 lbs. (1.8 kg)
Length: 11.22" (284.9 mm)
Width: 8.58" (217.9 mm)
Height: 2.10" (53.3 mm)

<b>Device Dimensions and Weights continued</b>
<b>EWS870AP / EWS871AP</b>
Weight: 6.61 lbs. (2.99 kg)
Length: 9.5" (241.2 mm)
Width: 8.23" (209 mm)
Height: 2.36" (59.9 mm)
<b>Package Contents</b>
Pole Mounting Bracket
Mounting Screw Set
Quick Installation Guide
<b>EWS650AP</b>
Power Adapter (48V/0.8A)
PoE Injector
<b>EWS660AP</b>
Power Adapter (12V/2A)
RJ45 Ethernet Cable
<b>EWS860AP</b>
Power Adapter (12V/2A)
3 x 5dBi Antennas (2.4 GHz)
3 x 7dBi Antennas (5 GHz)
RJ45 Ethernet Cable
<b>EWS870AP / EWS871AP</b>
Power Adapter (48V/1.25A)
PoE Injector (EPE-4818G)
<b>EWS871AP</b>
8 x Detachable N-Type Antennas
<b>Certifications</b>
FCC, IC, CE
<b>Warranty</b>
1-Year Standard

Maximum data rates are based on IEEE 802.11 standards. Actual throughput and range may vary depending on distance between devices or traffic and bandwidth load in the network. Compliant with FCC - This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his/her own expense. 2/06/17

EnGenius Technologies | 1580 Scenic Ave. Costa Mesa, CA 92626

Email: [partners@engeniustech.com](mailto:partners@engeniustech.com) | Phone: 888-735-7888 | Website: [engeniustech.com](http://engeniustech.com)

Features and specifications subject to change without notice. Trademarks and registered trademarks are the property of their respective owners. For United States of America: Copyright © 2017 EnGenius Technologies, Inc. All rights reserved.