

StrongArmCrash™ Order Form

To process your StrongArm M30 or StrongArm M50 order, it is a HySecurity requirement that you fill out all the customer information fields on this Order Form and sign all the necessary applications and agreements.

Date: _____ Purchase Order #: _____
 Installer Company: _____ Contact Person Name: _____
 Contact Phone #: _____ Contact Email: _____
 Jobsite: _____ Jobsite City, State: _____

Anchor and Template Kit: (When ordering, consider the timeframe required for the concrete foundation to properly cure)


- Ship in advance
- Ship with operator

Only one form is required when ordering multiple, identical StrongArm M30/M50 operators. Indicate quantity here: _____

1) Model:

- StrongArm M30 StrongArm M30 NP (No Power)
- StrongArm M50 StrongArm M50 NP (No Power)

2) Voltage and Phase: (Check One)


- 60HZ:** 208 V 1Ø 230 V 1Ø 208 V 3Ø 230 V 3Ø 460 V 3Ø
- 50HZ:**  220 V 1Ø 220 V 3Ø 380 V 3Ø
- NP (No Power)**

3) Pivot Posts, Catch Posts and Panel Covers: (Check One)

- Safety Yellow
- Galvanized
- Custom Color (RAL # _____)

4) Clear Opening: (Check One) * Measure Clear Opening

- 12 ft (366 cm)
- 14 ft (427 cm)
- 16 ft (488 cm)
- 18 ft (587 cm)
- 20 ft (610 cm)
- 22 ft (670 cm)
- 24 ft (731 cm)
- Custom Length** _____

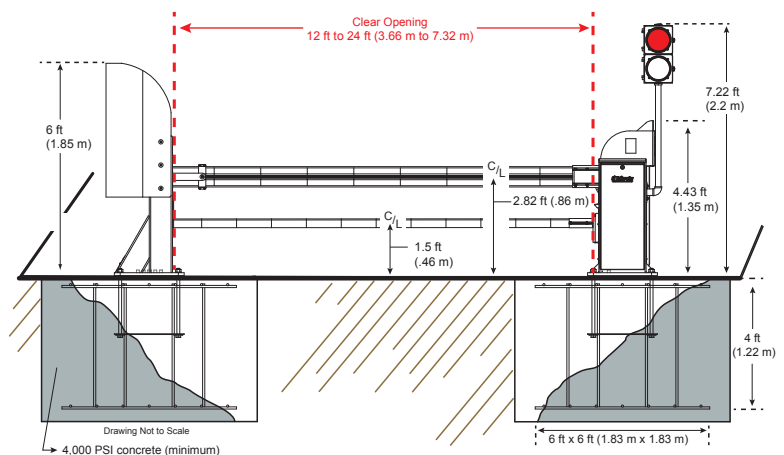

* Note: Barrier Arm adds 2 ft (61 cm) to the shipping container
 ** Note: Custom Lengths available in 1 inch increments. Longer lead times will apply. Please call Sales for details.

5) Photo Eye: (Standard Equipment. Check appropriate box for your site.)

- Wired Transmitter ***
- Battery Powered Transmitter

6) Options: (Check all that apply)

- Catch Post Heater
- Pivot and Catch Post Heater
- Pivot Post Heater
- Biodegradable Fluid
- AC Power Supply w/HyInverter AC
- Radio Receiver: Single Channel Open
- Maglock
- ExtremeCycle

*** Note: Installing a wired transmitter requires a separate run of conduit for low voltage wires

The order form must be fully completed and signed before the order will be processed. Review form to be sure all appropriate boxes were checked.

It is the responsibility of the HySecurity Distributor/Dealer to verify that the information on this order form is accurate. As stated in the Global Sales Agreement, custom orders are non-returnable.

Order has been reviewed and approved by:

PRINT NAME

HYSECURITY DISTRIBUTOR/DEALER

SIGNATURE

DATE

FOR INTERNAL USE ONLY

Prior to processing the order, all of the following requirements must be met:

Dealer Requirements:

- Fortified Crash Barrier Dealer Application
- Fortified Crash Barrier Dealer Credit Application
- Global Sales Agreement
- Maintains \$2 million of liability insurance coverage and a security bond of \$50,000 minimum
- Certificate of Attendance: HySecurity Tech Training
- Certificate of Attendance: HySecurity Fortified Crash Barrier Technical Installation Training
- OR HySecurity On-Site Training for First Installation Agreement

If Anchor and Templates Kit advanced: Sales Order # _____ Date Shipped _____

SIGNATURE

DATE