

Wet Chemical

Corner Pulley




A UTC Fire & Security Company

Effective: May 2007
K-87-019

P/N: 844848

DESCRIPTION

The Corner Pulley can be used in both low and high temperature environments. The pulley contains steel ball bearings and the body is cast aluminum. A 1/16-inch (2 mm) diameter stainless steel 7x7 strand cable is used for the detection line. It is installed using 1/2-inch (13 mm) EMT.

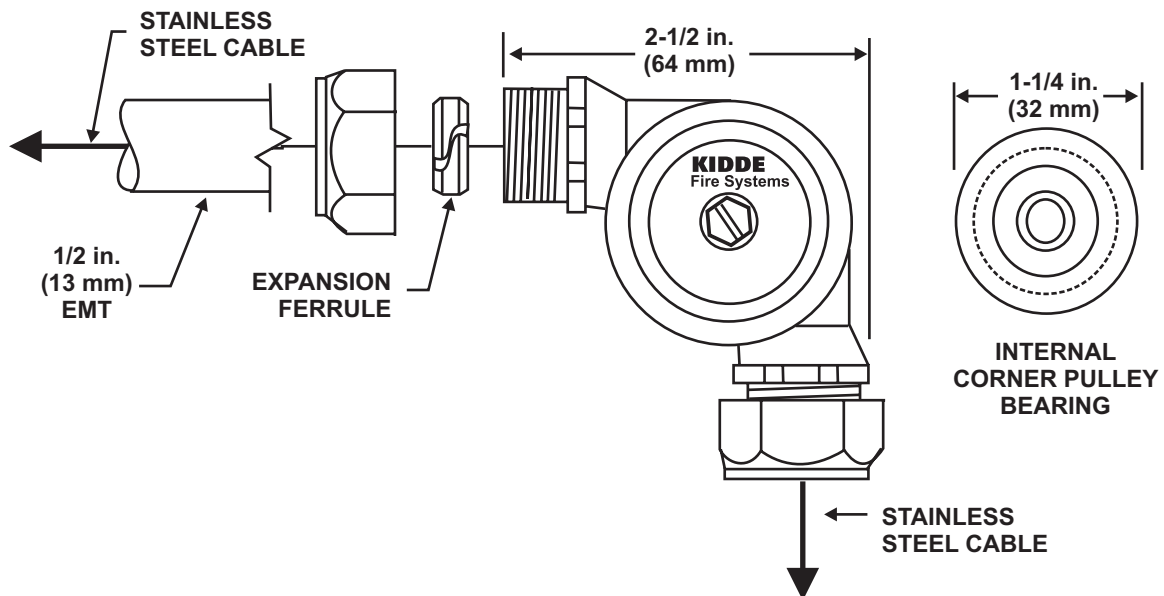

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to work correctly. If you need more information on this product, or if you have a particular problem or question, contact KIDDE-FENWAL, INC., Ashland, MA 01721. Telephone: (508) 881-2000.