

Parabolic antenna JRC-32DD DupLEX Precision

Dual-polarized parabolic antenna **JRC-32 Deep Dish DupLEX Precision** is designed for directional links with **full-duplex mode** or MIMO mode duplex mode at the frequency band 5 GHz with high isolation level. The antenna is designed for long distances. **Its design with deep dish increases isolation among antennas on a mast increases front to back ratio.** The Precision version includes a **massive holder JDMW-900** developed for microwave links.

Electrical parameters:

Frequency range	4.9 – 6.1 GHz
Gain	32.1 ± 1 dBi
VSWR 5.1-5.9 GHz	≤ 1.6
Beamwidth -3 dB	4.3°
Port to port isolation 5.1-5.9 GHz	≥ 50 dB (typ. 53 dB) (rest of the freq. range ≥ 43 dB)
Front to Back ratio	≥ 52 dB
Polarization	Linear, vertical/horizontal or 45°

Mechanical parameters:

Parabola	Ø 900 mm, Aluminium alloy
Radome	UV steady plastic ABS
Type of connector	N-female, R-SMA
Installation for mast	Ø 40 - 120 mm
Operating wind load	140 km/h (87 mph)
Survival wind load	210 km/h (130 mph)
Weight of antenna	8.4 kg (18.5 lbs.)
of holder	3.2 kg (7.0 lbs.)
Shipping dimensions	1000 x 990 x 430 mm / 18.2kg (40.1 lbs.)

Parabolic antenna JRC-32DD DupLEX Precision

Usage:


The antenna can be used in combination with an outdoor metal box JR – 350 Alu for AP, RouterBOARDS and other electronics. Mount the antenna has separate latching nuts for easy mounting and adjustment of the azimuth and elevation. Right and left side mounting is possible.

The antenna is supplied with a holder (packed separately) that allows easy mounting on a mast. The holder can be installed separately on the mast. Subsequently, you can simply hang up the antenna with microwave unit into it. The holder allows precise adjustment in both directions. In the areas with the expected occurrence of the strong winds mounting on the mast with minimal $\varnothing$ 50 mm is recommended.


Parabolic antenna JRC-32DD DupLEX Precision

Measurement of radiation pattern:


JRC-32DD DupLEX Precision - E-plane

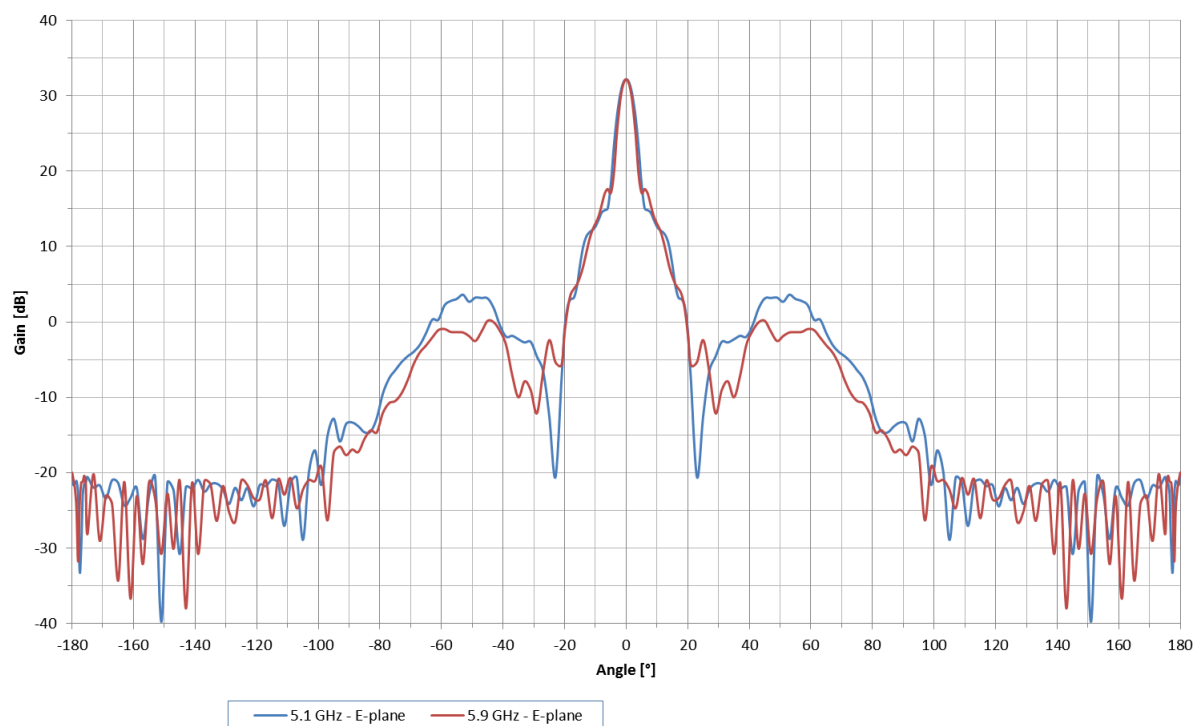

JRC-32DD DupLEX Precision - H-plane

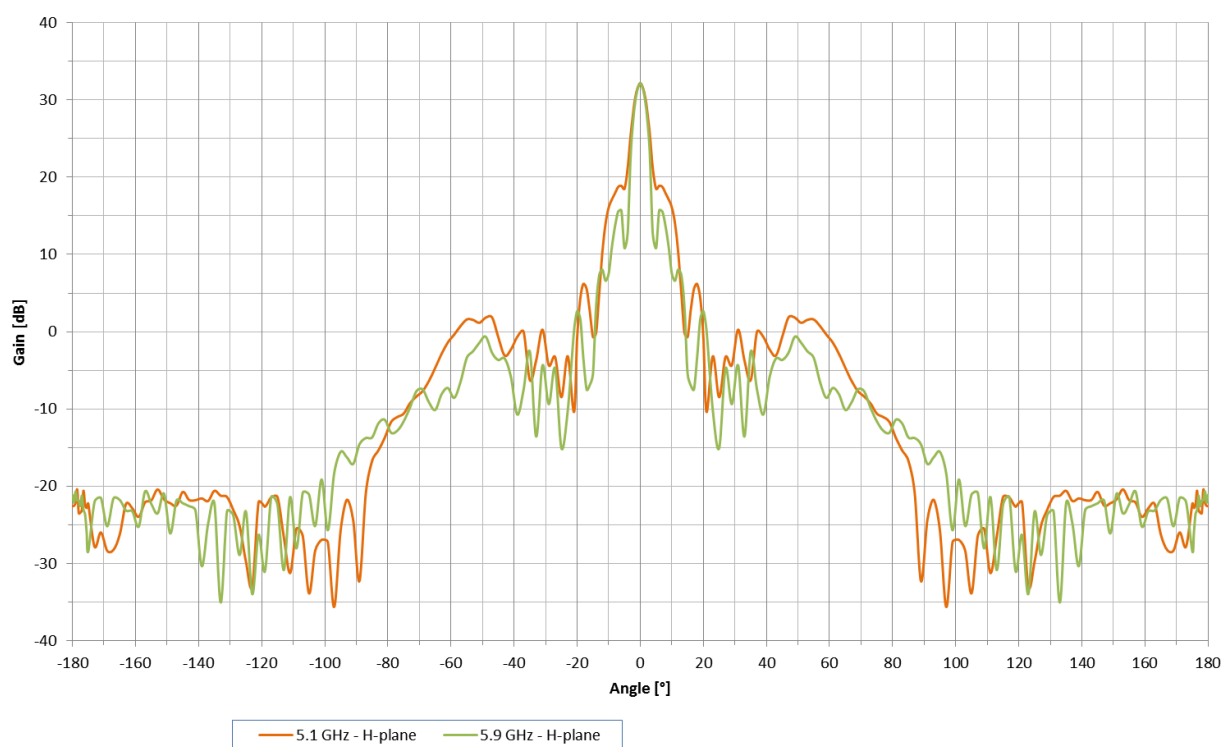


Parabolic antenna JRC-32DD DupLEX Precision

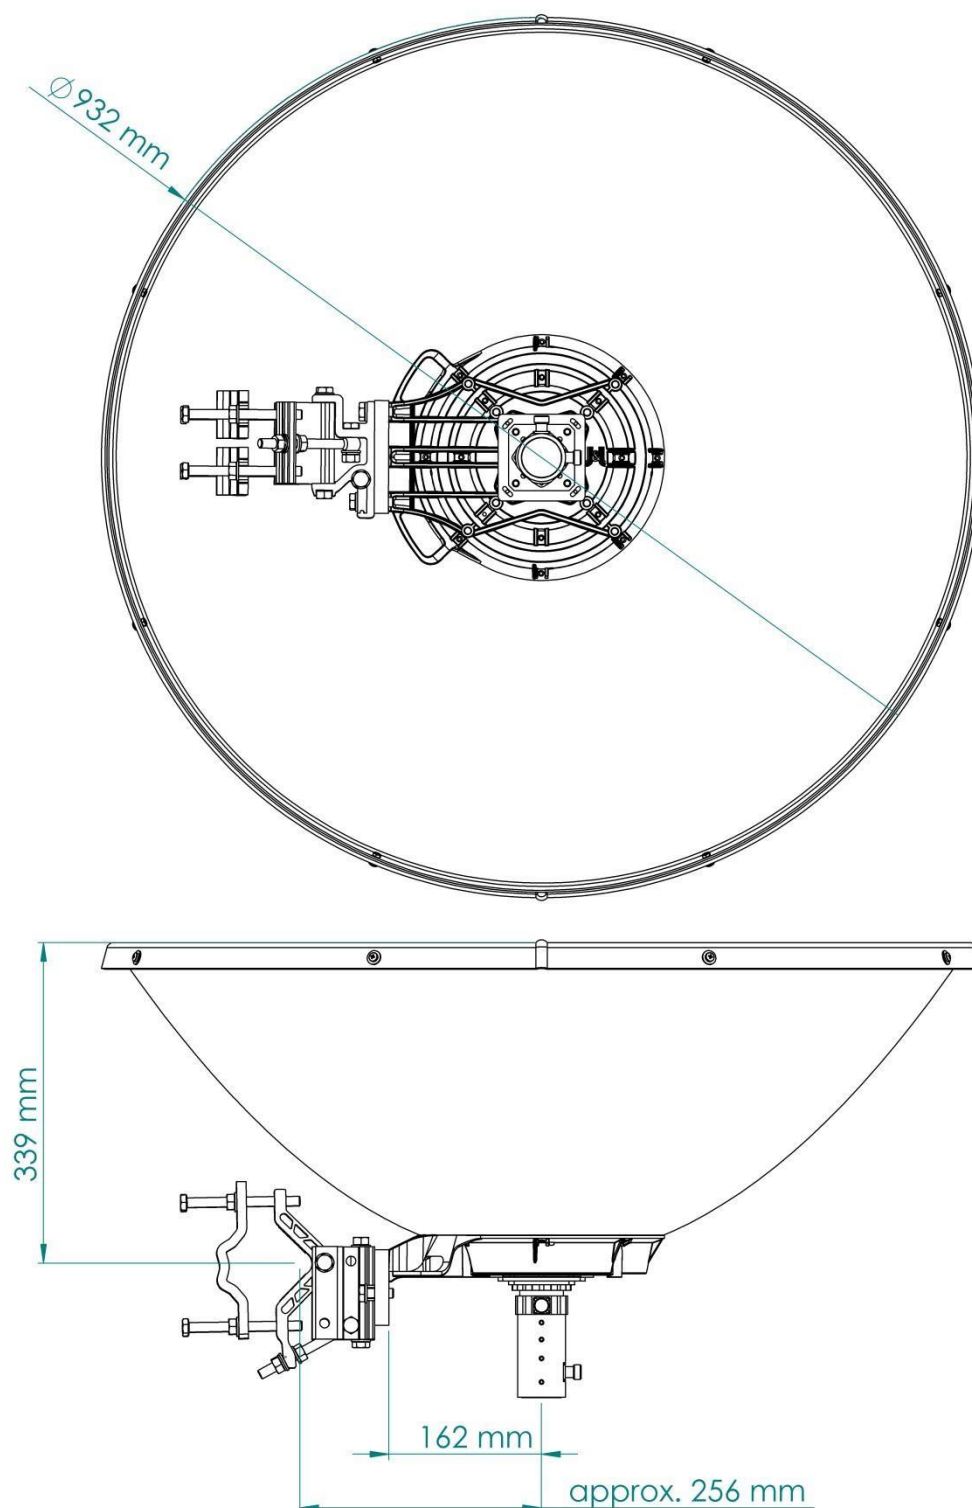

Parabolic antenna JRC-32DD DuplEX Precision

Wind loading:

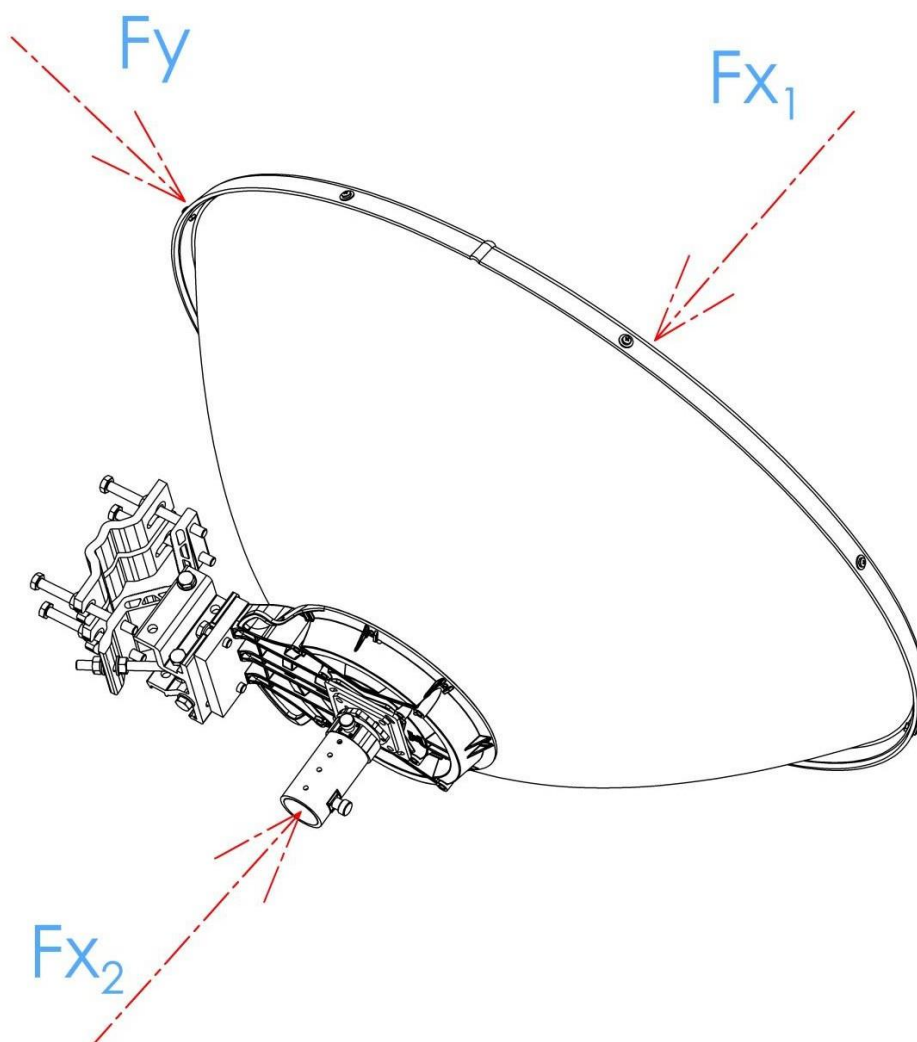

Wind Loading at 200 km/h [125 mph]

Direction	Force [N]	Force [lbf]
F_{x_1}	1443	324,4
F_{x_2}	1324	297,4
F_y	91	20,4