


NEMA 4X/IP66 Rated Wireless Security Enclosure

SPECIFICATIONS

The NEMA Wireless Security Enclosure (WSE) shall have both a NEMA 4X and an IP66 rating to provide protection against corrosion, windblown dust and rain, splashing water, and hose-directed water. The WSE shall be constructed of fiberglass reinforced polyester (FRP) and be capable of mounting intelligent gateways and security cameras in various locations on the enclosure. The WSE shall include a pre-drilled aluminum mounting plate with a 4CS-1/2 handy box installed. The enclosure shall have two pre-drilled inlets with NEMA 4X compression fittings installed to allow ingress/egress of cable while maintaining NEMA 4X ratings. The enclosure shall have a pre-installed tamper proof pole mount bracket that is suitable for wooden or metal pole deployments. The WSE shall include steel strapping and a connectivity accessory kit. The WSE shall have provisions for padlocks to protect against tampering and theft.



TECHNICAL INFORMATION

Standards:	Complies with NEMA 4X Complies with IP66 UL508A Listed as an Industrial Control Panel
External dimensions:	14"H x 12"W x 6"D (355.6mm x 304.8mm x 152.4mm)

KEY FEATURES AND BENEFITS

NEMA 4X and IP66 rating:	Provides protection against corrosion, windblown dust and rain, splashing water, and hose-directed water
Fiberglass construction with aluminum mounting plate:	Allows installer to perform field modifications (i.e.; drilling) on the enclosure
Pre-installed tamper proof pole mount bracket:	Allows the enclosure to be securely mounted on a wooden or metal pole
UL508A Listed as an industrial control panel enclosure:	Pre-configured with a 4CS-1/2 handy box to provide AC power for wireless equipment
Connectivity accessory kit:	Simplifies installation by including a two-position Mini-Corn [®] outlet box, Mini-Corn [®] TX6 [™] PLUS Jack Module, TX6 [™] PLUS Patch Cord, steel strapping, and silicone sealant
Provisions for padlocks:	Allows the enclosure to be secured against tampering and theft

APPLICATIONS

Panduit NEMA 4X/IP66 Rated Wireless Security Enclosures used to protect a wireless security network from tampering and theft by enclosing LTE intelligent gateways. These products are specifically designed for use in deploying a security camera in outdoor and industrial environments. The universal design of the enclosures allows customization to accommodate most LTE intelligent gateways. The NEMA 4X/IP66 Rated Wireless Security Enclosure can be customized to meet specific wireless LAN design specifications to provide a flexible, easy to use and install wireless security solution.

NEMA 4X/IP66 Rated Wireless Security Enclosure

PD Blue: [NWSE1412B](#)

NEMA 4X Rated Accessories

Drain and vent kit: [PZNDVK](#)

PoE Extenders

1-Port PoE extender kit: [POEXKIT1](#)

4-Port PoE extender kit: [POEXKIT4](#)

1-Port PoE extender kit, no power plug: [POEXKIT1-NP](#)


4-Port PoE extender kit, no power plug: [POEXKIT4-NP](#)

1-Port transmitter box: [POEXTX1](#)

1-Port receiver box: [POEXRX1](#)

4-Port receiver box: [POEXRX4](#)

NEMA 4X/IP66 Rated Wireless Security Enclosure

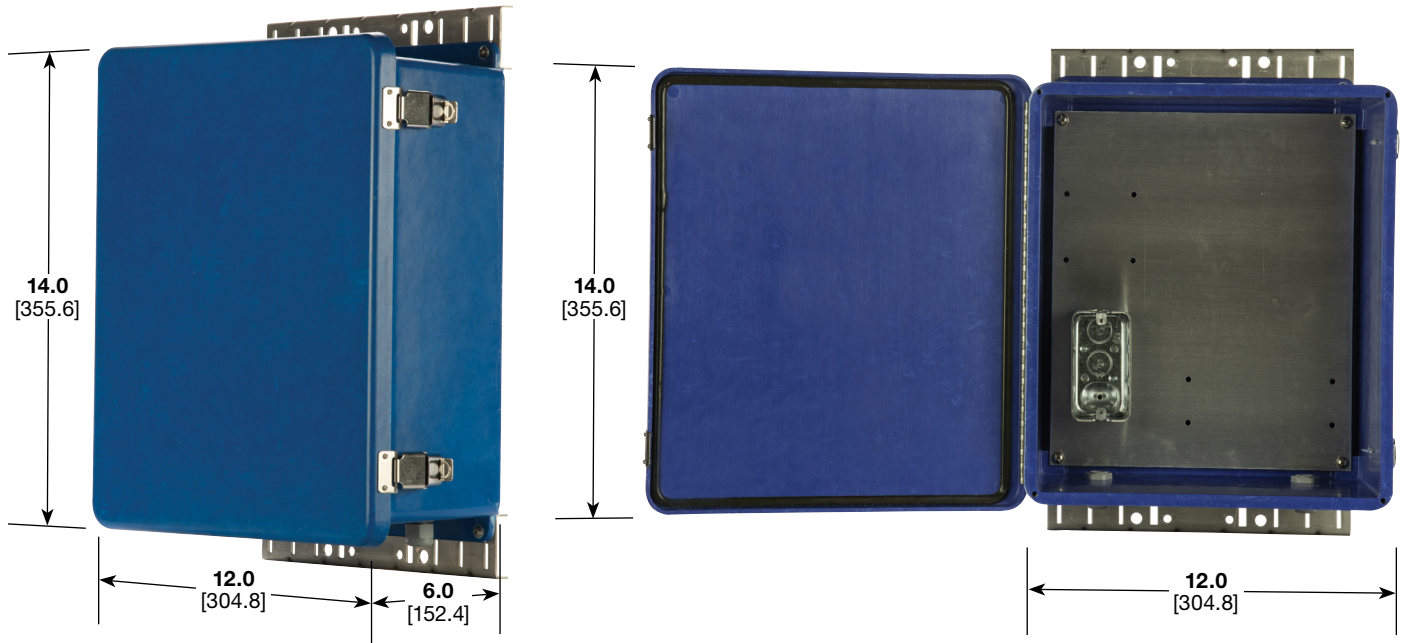

Dimensions are in inches. [Dimensions in brackets are metric].

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
Phone: 65.6305.7575

PANDUIT JAPAN
Tokyo, Japan
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA
Guadalajara, Mexico
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty

PANDUIT[®]

For more information
Visit us at www.panduit.com
Contact Customer Service by email: cs@panduit.com
or by phone: 800.777.3300

© 2024 Panduit Corp.
ALL RIGHTS RESERVED.
RKSP226-WW-ENG
3/2024