


HIKVISION CONFIDENTIAL INFORMATION  
UNAUTHORIZED DIFFUSION IS PROHIBITED

SECURITY CLASSIFICATION: AA

DWG NO:  
A3

1	2	3	4	5	6	7	8
LENGTH(M)	TOL(L <sup>1</sup> / <sub>2</sub> )	PART NAME	OPTIMAL				
1 M	±50	AE-MC0201-1 (12M4A_B to 12M4B_B)					
2 M	±50	AE-MC0201-2 (12M4A_B to 12M4B_B)	✓				
3 M	±50	AE-MC0201-3 (12M4A_B to 12M4B_B)					
4 M	±50	AE-MC0201-4 (12M4A_B to 12M4B_B)	✓				
5 M	±50	AE-MC0201-5 (12M4A_B to 12M4B_B)					
6 M	±100	AE-MC0201-6 (12M4A_B to 12M4B_B)	✓				
7 M	±100	AE-MC0201-7 (12M4A_B to 12M4B_B)					
8 M	±100	AE-MC0201-8 (12M4A_B to 12M4B_B)	✓				
9 M	±100	AE-MC0201-9 (12M4A_B to 12M4B_B)					
10 M	±100	AE-MC0201-10 (12M4A_B to 12M4B_B)	✓				
11 M	+150 -100	AE-MC0201-11 (12M4A_B to 12M4B_B)					
12 M	+150 -100	AE-MC0201-12 (12M4A_B to 12M4B_B)	✓				
13 M	+150 -100	AE-MC0201-13 (12M4A_B to 12M4B_B)					
14 M	+150 -100	AE-MC0201-14 (12M4A_B to 12M4B_B)	✓				
15 M	+150 -100	AE-MC0201-15 (12M4A_B to 12M4B_B)					
16 M	+200 -100	AE-MC0201-16 (12M4A_B to 12M4B_B)	✓				
18 M	+200 -100	AE-MC0201-18 (12M4A_B to 12M4B_B)	✓				
20 M	+200 -100	AE-MC0201-20 (12M4A_B to 12M4B_B)	✓				
25 M	+200 -100	AE-MC0201-25 (12M4A_B to 12M4B_B)					

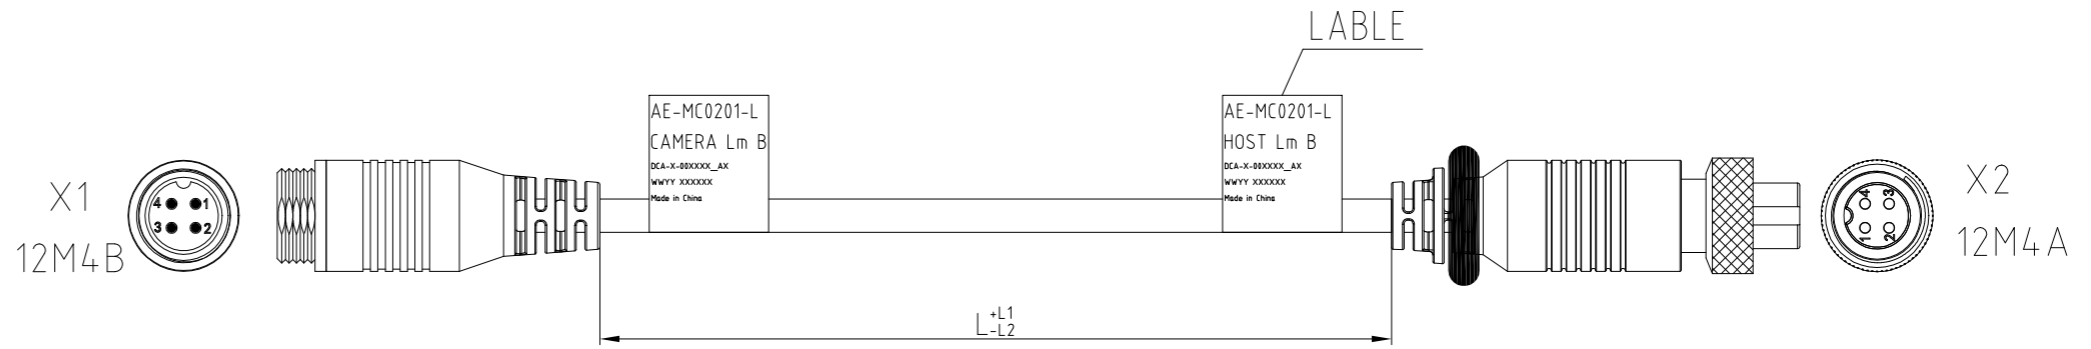


PIN Table:

X1	Colour	X2	Signal
1	Y(C)	1	VIDEO
2	W	2	AUDIO
3	R	3	POWER
4	S+E	4	GND

NOTES:

- 1.All the materials must be compliant RoHS;
- 2.Working tempature: -40~105°C;
- 3.Process conforms to the IPC620 standard 3;

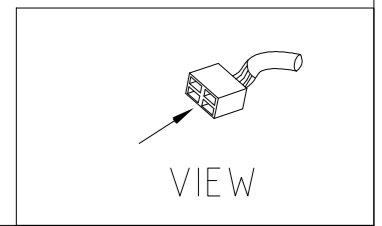

NO.	REV	DESCRIPTION	AREA	BY	DATE
<1>					
DESIGN		PART NAME: AE-MC0201-L (12M4A_B to 12M4B_B)	PART NO:		
APPROVED		DWG NO:	REV:	STATE:	<b>HIKVISION</b> HANGZHOU HIKVISION DIGITAL TECHNOLOGY CO. LTD.
STANDARD		MATERIAL:	WEIGHT:	GRADE:	
MCODE		FINISH:	FIRST_USED_ON	FIRST ANGLE	SCALE
				1:1	SIZE: A3
					SHEET 1 OF 1

(Conform to the requirements of the RoHS)