

**DS-D40S-2F**  
**640\*480MM**



- High refresh rate and Ultra-high contrast ratio, more delicate and smooth video , and more realistically image with excellent color performance
- 4:3 ratio cabinet, best choice for high cost performance
- Highly integrated and compatible cabinet with simple and lightweight design
- Cable-free design and Ultra-thin backshell for easier installation, easier to level the lamp boards, and make the splicing more flat
- Modular structure design, support module, power supply, receiver card front maintenance


## ▪ Specification

<b>Product Model</b>	
Product Model	DS-D40S-2F
<b>Product Type</b>	
Product Type	LED Display Structure
<b>Cabinet</b>	
Pixel Configuration	SMD Triad LED
Modules Component	2 × 3
Dimensions (W × H × D)	640 (W) mm × 480 (H) mm × 36 (D) mm (25.197" × 1.898" × 1.42")
Area	0.3072 m <sup>2</sup>
Weight	6 kg (13.23 lb.)
Cabinet Material	Die cast aluminum
Maintenance Method	Complete front maintenance
<b>Power</b>	
Max. Consumption	≤ 450 W/m <sup>2</sup>
Average Consumption	< 150 W/m <sup>2</sup>
Input Voltage	100~240 VAC ± 10%
<b>Working Environment</b>	
Working Temperature	-10 ℃ to 40 ℃ (14 ℉ to 104 ℉)
Working Humidity	10% to 60% RH (without condensation)
Storage Temperature	-20 ℃ to 60 ℃ (-4 ℉ to 140 ℉)
Storage Humidity	10% to 85% RH (without condensation)
<b>General</b>	
Package Dimension (W × H × D)	760 (W) mm × 318 (H) mm × 587 (D) mm (29.92 " × 12.52 " × 23.11 ")
Packing List	Regulatory Compliance and Safety Information × 1 Several Joint pieces, Fixing screws and Signal cables Several LED lamp beads and IC components
Gross Weight	4.7 kg (10.3 lb.)
Net Weight	3.7 kg (8.15 lb.)
<b>Bracket</b>	
Modular Bracket	DS-DL116448W 1*1; DS-DL126448W 1*2; DS-DL226448W 2*2

## ▪ Available Model

DS-D40S-2F, 640\*480MM Cabinet Structure

▪ **Dimension**

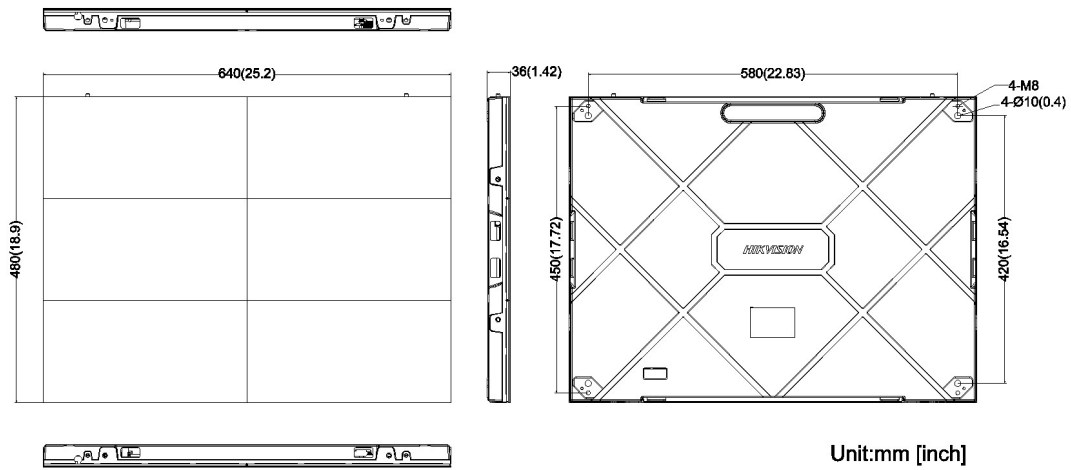

▪ **Accessory**



# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

