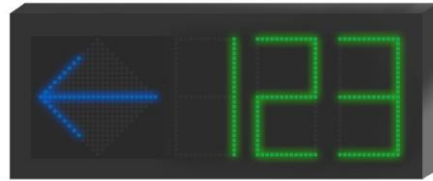


DS-TVL121-3-5D**Indoor, seven-color, Single Row, Led Screen**

- Equipped with standard RS485/RJ45 communication mode
- LED module supports shift left, shift up, upward expanding, downward expanding, Real-time display
- LED module supports 7 colors display, Remaining parking number display
- Mounting mode: Hoisting
- Logic address 0~255


▪ Specification

Display Screen	
Display Content	Support 3 numbers 1 arrow display
Display Color	Red/Green/Yellow/Blue/Cyan/Magenta/White
Display Mode	Shift left, Shift up, Upward expanding, Downward expanding
Scanning Mode	1/16 A Model Scanning
Display Icon	Pregnant Women/Disabled/Women/Charging
Communication Mode	RS485/RJ45
General	
Power Supply	110 VAC – 220 VAC
Power Consumption	Max. 14W
Dimensions	584 × 226 × 89 mm (23.0 × 8.9 × 3.5 inch)
Weight	5 kg (11.0 lb.)
Weight (with Package)	8.5 kg (18.7 lb.)
Dimensions (with Package)	810 × 360 × 150 mm (31.9 × 14.2 × 5.9 inch)

▪ Available Model

DS-TVL121-3-5D

▪ Dimension

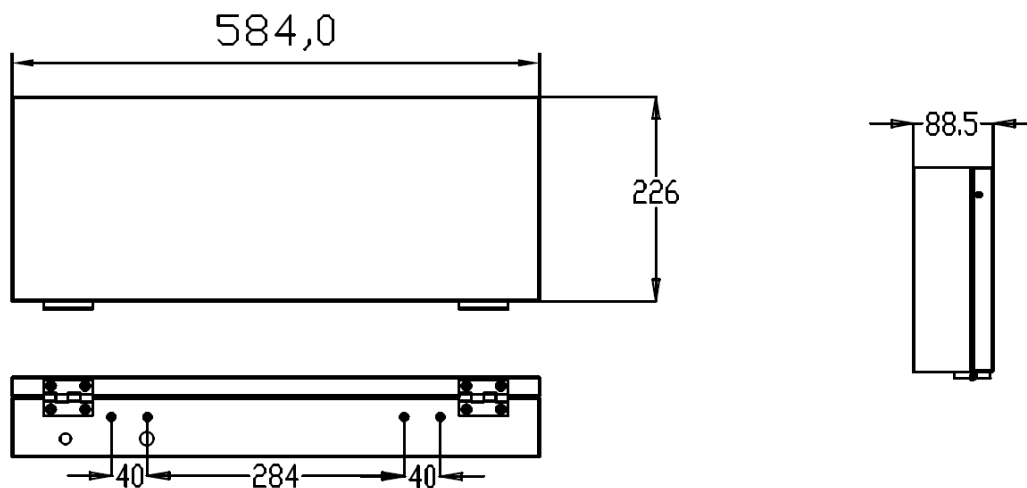

DS-TVL121-3-5D



See Far, Go Further



www.hikvision.com
support@hikvision.com

