

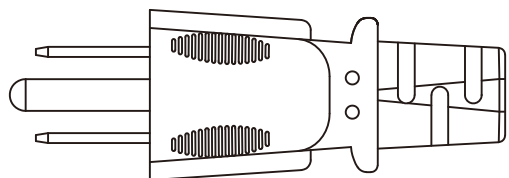


P1



P1	A010229	A1	P2
L	Black	L	
N	White	N	
E	Green	E	

P2

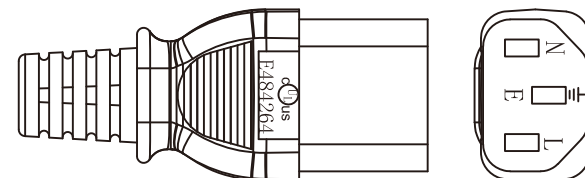

E484263 (UL) SJT VW-1 105°C 300V 3×0.824mm² (18AWG) Or C(UL)
SJT FT1 105°C 300V 3×0.824mm² (18AWG) YONG JIA XING

NOTE:

1: All cables are 100% tested: any open, Mis-wiring & short are not permitted.
Withstanding voltage: 2500V.
Insulation resistance: 100M Ohm (min).
2: All material must be RoHS Compliance.

No.	DESCRIPTION	Q' TY	Supplier
4	Cable Tie: 150mm Black	1PCS	
3	Molded 45P PVC Black	1PCS	
	C13 Plug, One Type, White Insulation, Brass	1PCS	
2	Molded 45P PVC Black		
	Bracket: UL 3P White PBT	1PCS	
	UL PLUG Blades Solid, NOT Polar	2PCS	
	UL Plug Blades □4.75mm	1PCS	
1	SJT 18AWG/3C Black OD7.8mm	L	