

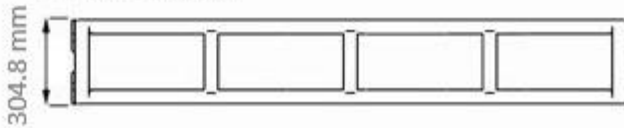


Vista Superior



Vista Lateral

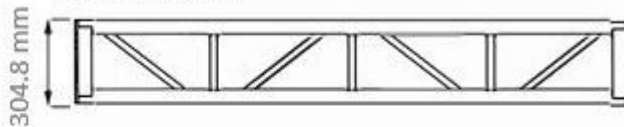

(171.98 mm) Separación de orificios de tornillo

Especificación

Material	6061-T6
Tubo principal	Φ50*3mm
Tubo secundario	Φ50*2mm
Tubo diagonal	Φ25*2mm
Peso	-8.5kg/m

1 inch=25.4mm | 1m=3.28ft | 1 lbs=0.453kg

EPYT30STT (tabla de carga)	Span(m)	4m	5m	6m	8m	10m	12m
UDL	(kg)	2220	1520	1100	820	520	380
DEFLECCIÓN	(mm)	27	46	70	103	141	185
CPL	(kg)	1310	810	610	360	210	130
DEFLECCIÓN	(mm)	39	58	85	103	136	166

1 inch=25.4mm | 1m=3.28ft | 1 lbs=0.453kg

UDL: Carga uniformemente distribuida

CPL: Carga puntual al centro