

DS-MDS003 Dock Station



Dock station provides you with an easy way to access body cameras, and collect, store, and play audio, video, and picture files in the connected body cameras.

- Dual system design which is highly stable. Supports wall mount, mobile mount, and desktop mount.
- 13.3-inch ultra-large touchscreen with 1920 × 1080 resolution and convenient operation.
- Unlocks body camera bin by recognizing face to guarantee safe device storage.
- Equipped with eight body camera bins in standard. Four dock stations can be connected. Each dock station is equipped with eight body camera bins. Up to 32 body cameras can be connected simultaneously. Supports auto charging.
- Two standard USB interfaces provided. One is used to connect to a mouse or keyboard for software operation, or connect to a USB flash disk to upgrade the dock station. The other one is reserved.
- Supports six hard disks. Standard 2 TB storage capacity. Up to 8 TB for each disk. RAID 0, RAID 1, and RAID 5 can be customized.
- Supports auto uploading of body camera data (picture, video, and audio), and clearing the storage space of body camera automatically.
- Locks important data of body camera to avoid being deleted.
- Supports data protection in sudden power cutoff.
- Log management to record all the operation logs.
- Overwritten storage to overwrite the collected data according to the collection sequence when the storage is full.
- ANR for data uploading to prevent data loss.
- Supports file search in multiple modes, and video, audio, and picture playback.
- Local upgrade.
- Multi-user management. Multi-users can be associated with one dock station.
- Files can be uploaded to CVR and cloud storage.

**Wall-mounted bracket and bracket assembly are required for the dock station DS-MDS003/DS-MDS005.*

**Notes:*

**Wall mounted: need to order bracket (DS-MH1901 or DS-MH1902)*

**Desktop and mobile mount: need to order bracket (DS-MH1901 or DS-MH1902) and bracket assembly (DS-MH1601 or DS-MH1602)*

▪ Specification


Screen	
Screen Type	LCD
Display Resolution	1920 × 1080
Touchscreen	Supported
Storage	
RAM	2 GB
HDD	Up to 6 disk(s) (Max. 8 TB for each disk) and default 1 × 2 TB
Network	
Protocol	HTTPS, FTP, NTP, SADP, ISAPI
Interface	
General Interface	1 × RJ 45, 1 × RS-232, 1 × USB 2.0, 1 × USB 3.0
Base Parameters	5 VDC, 1.5 A for each channel, rate ≥ 5 MB/s
Body Camera Access Number	Up to 32 body camera(s)
Button	Power
Indicator	2 indicator(s) for charging/working/recording/exception
General	
Storage Condition	-25 °C to 50 °C (-13 °F to 122 °F). Humidity 95% or less (non-condensing)
Operating Condition	-10 °C to 55 °C (-14 °F to 131 °F). Humidity 95% or less (non-condensing)
Web Browser	Plug-in required live view: IE 10+, Plug-in free live view: Chrome 57.0+, Firefox 52.0+
Weight	24.1 kg (53.13 lb.)
Power	100 to 240 VAC, max. 500 W
Operating System	Linux, Android 5.1.1
Dimensions	635 mm × 604.6 mm × 108.7 mm (25" × 23.8" × 4.3")
Installation Method	Desk-mounted, wall-mounted, movable bracket
Client	HikCentral Pro, HikCentral Master

▪ Available Model

DS-MDS003/2T/8

DS-MDS003/2T/8/TYPEC



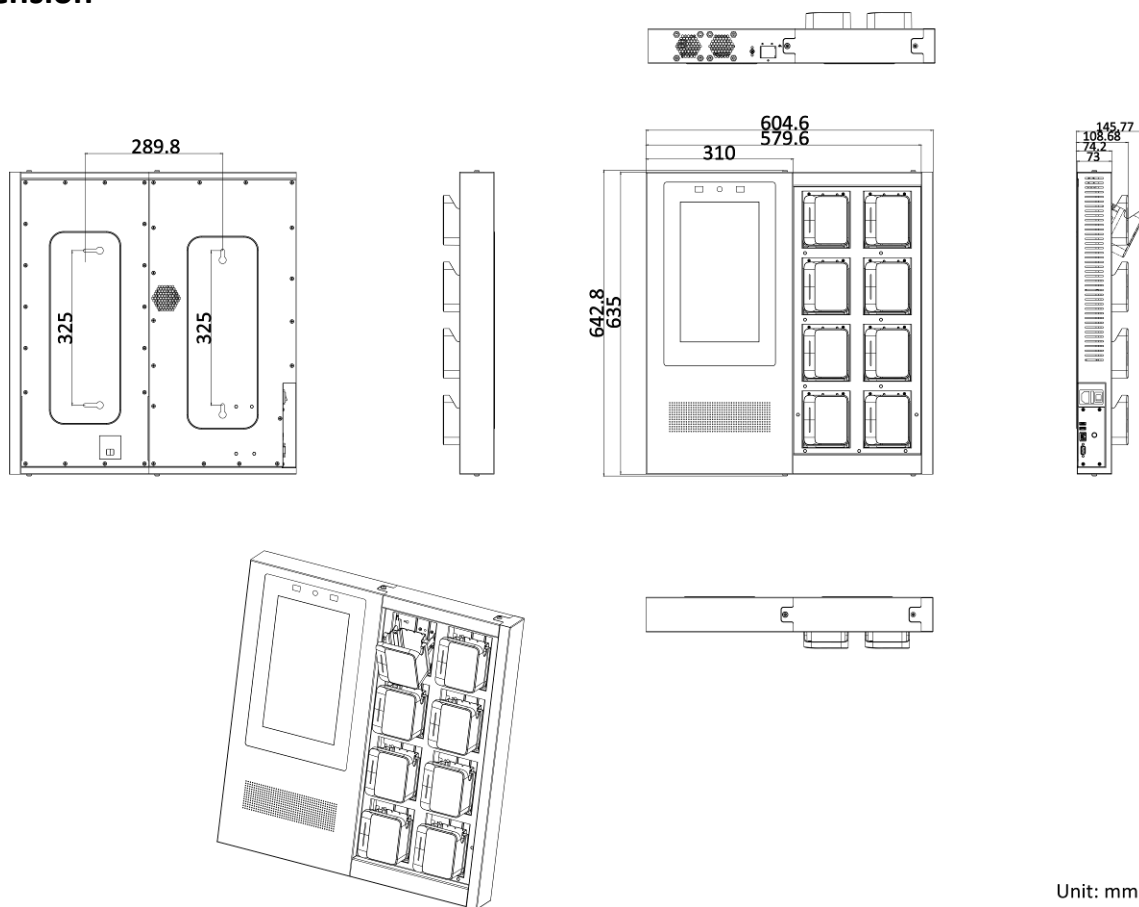


▪ **Dimension**



Unit: mm

Accessory

▪ **Optional**

DS-MH1601 Dockstation Desktop Bracket	DS-MH1901 Dockstation Mount Bracket	DS-MH1902 Dockstation Mount Bracket	DS-MH1602 Dockstation Mobile Bracket	DS-MDS003-E 8 Ports Dock Station Expansion Unit
				

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

