


DS-D4626CE-1AB/M
DS-D4626CE-1AB/M




- Spare module for DS-D4626CE22-1AB

▪ Specification

Product Type	
Product Type	Spare Modules Package
Cabinet	
Pixel Configuration	SMD Triad LED
Pixel Pitch Category	P2.6
Pixel Pitch	2.6042 mm
Resolution	96 × 96
Pixel Density	147456 dots/m ²
Lamp Board Housing	With housing
Maintenance Method	Front & Rear maintenance
Display	
White Balance Brightness	1000 cd/m ²
Color Temperature	6500K adjustable
Viewing Angle	Horizontal 160°, vertical 140°
Contrast Ratio	≥ 6000:1
Color Uniformity	≤ ± 0.004Cx , Cy
Brightness Uniformity	≥ 97%
Processing Performance	
Frame Frequency	50/60 Hz
Refresh Rate	7680 Hz
Grey Level	14 bit
Key Material	
Lamp Encapsulation	SMD1515
Control System	Hikvision
Working Environment	
Working Temperature	-20 °C to 45 °C (-4 °F to 113 °F)
Working Humidity	10% RH to 90% RH (No condensation)
Storage Humidity	10% RH to 90% RH (No condensation)
Storage Temperature	-40 °C to 60 °C (-40 °F to 140 °F)
General	
Package Dimensions (W × H × D)	320 (W) mm × 315 (H) mm × 150 (D) mm (12.60" × 12.40" × 5.91")
Gross Weight	2.8 kg/4 in 1 (6.17 lb.)

▪ Dimension

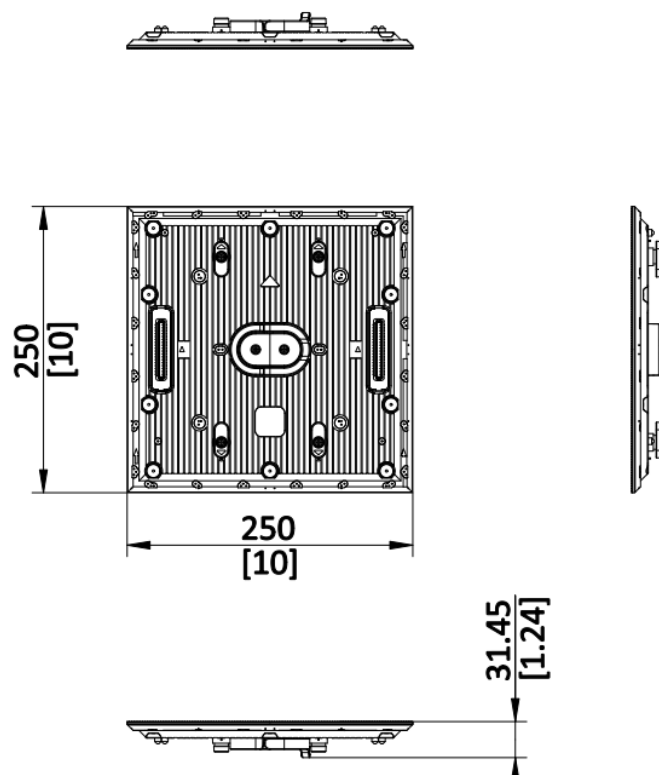

Unit: mm [inch]

SCALE	1:1
-------	-----

▪ Accessory



DS-D4626CE22-1AB

See Far, Go Further



www.hikvision.com
support@hikvision.com

