


**DS-D4626CE22-1AB****DS-D4626CE22-1AB**

- Cube version for Aries & Aries Pro series' full range of 500\*500mm products
- Delivered with curve lock system as standard, with cube lock system in the accessory box
- Can be connected with the general panels
- Both curve and cube lock systems are quick-release compatible

## ▪ Specification

| Cabinet                       |                                                                  |
|-------------------------------|------------------------------------------------------------------|
| Pixel Configuration           | SMD Triad LED                                                    |
| Pixel Pitch Category          | P2.6                                                             |
| Pixel Pitch                   | 2.6042 mm                                                        |
| Modules Component             | 2 × 2                                                            |
| Dimensions (W × H × D)        | 500 (W) mm × 500 (H) mm × 69 (D) mm (19.69" × 19.69" × 2.72")    |
| Resolution                    | 192 × 192                                                        |
| Area                          | 0.25 m <sup>2</sup>                                              |
| Weight                        | 7.4 kg (16.31 lb.)                                               |
| Pixel Density                 | 147456 dots/m <sup>2</sup>                                       |
| Lamp Board Housing            | With housing                                                     |
| Cabinet Material              | Die-casting Aluminium                                            |
| Maintenance Method            | Front & Rear maintenance                                         |
| Protection Level              | IP40                                                             |
| Display                       |                                                                  |
| White Balance Brightness      | 1000 cd/m <sup>2</sup>                                           |
| Color Temperature             | 6500K adjustable                                                 |
| Viewing Angle                 | Horizontal 160°, vertical 140°                                   |
| Contrast Ratio                | ≥ 6000:1                                                         |
| Color Uniformity              | ≤ ± 0.004Cx, Cy                                                  |
| Brightness Uniformity         | ≥ 97%                                                            |
| Processing Performance        |                                                                  |
| Driving Method                | 1/24                                                             |
| Frame Frequency               | 50/60 Hz                                                         |
| Refresh Rate                  | 7680 Hz                                                          |
| Grey Level                    | 14 bit                                                           |
| Key Material                  |                                                                  |
| Lamp Encapsulation            | SMD1515                                                          |
| Control System                | Hikvision                                                        |
| Power                         |                                                                  |
| Power Supply                  | AC: 110 to 220 V ± 15%                                           |
| Max. Consumption              | ≤480 W/m <sup>2</sup> (1000nits)                                 |
| Average Consumption           | ≤160 W/m <sup>2</sup>                                            |
| Working Environment           |                                                                  |
| Working Temperature           | -20 °C to 45 °C (-4 °F to 113 °F )                               |
| Working Humidity              | 10% RH to 90% RH (No condensation)                               |
| Storage Humidity              | 10% RH to 90% RH (No condensation)                               |
| Storage Temperature           | -40 °C to 60 °C (-40 °F to 140 °F )                              |
| General                       |                                                                  |
| Gross Weight                  | 111 kg/10 in 1 (244.71 lb.)                                      |
| Package Dimension (W × H × D) | 1092 (W) mm × 610 (H) mm × 580 (D) mm (42.99" × 24.02" × 22.83") |

## ▪ Dimension

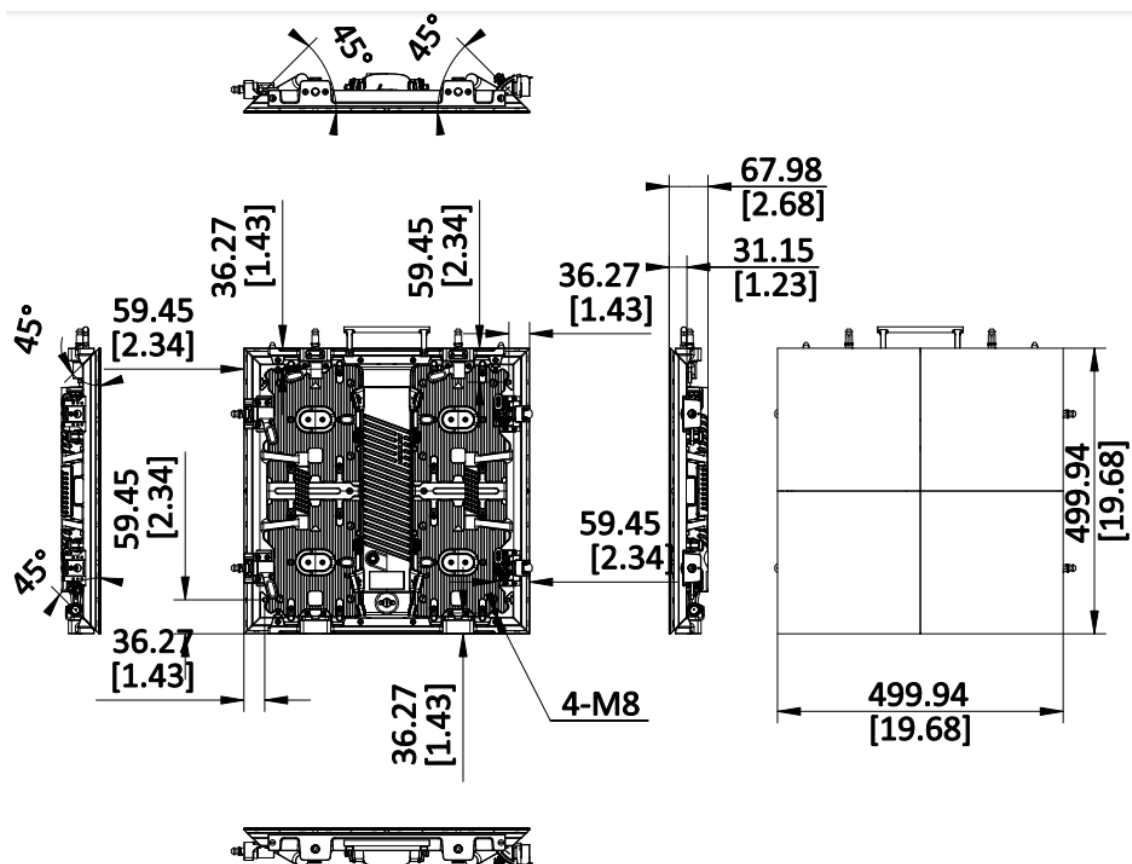

Unit: mm [inch]

SCALE 1:2

▪ Accessory

▪ Optional

| DS-D4626CE-1AB/<br>M | DS-D46XXCD-1A/A<br>1 | DS-DPRSS-1B/HBB<br>S05/FC | DS-D46XXCD-1A/A<br>2 | DS-DPRSS-1B/HBB<br>S05/CB |
|----------------------|----------------------|---------------------------|----------------------|---------------------------|
|                      |                      |                           |                      |                           |

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

