

DS-1322HZ-C

Outdoor Housing



Features:

- All-weather integrated design, convenient installation and maintenance.
- Fully sealed design, high temperature resistance, Anti-strong wind; storm and dust.
- Configure different types of camera lens according to the respective requirements.


Notice:

- Read the instructions carefully and observe all warnings before installing this equipment.
- Turn off the power before wiping this equipment, do not use liquid or spray cleaning agent.
- Do not install on unstable bracket.
- Protect the power line, especially the flexible line of the plug and camera.

Order Model:

DS-1322HZ-C

Dimension:

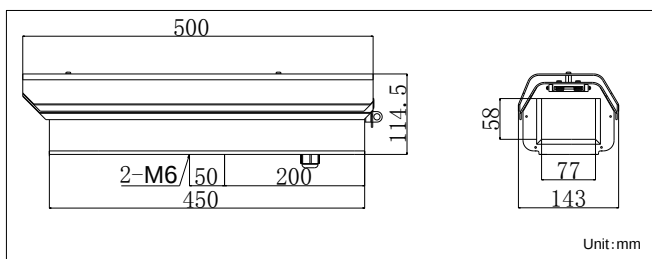

Parameter:

Parameters	Model
	DS-1322HZ-C
	Outdoor Housing
Produce features	Contain fan, suitable for high temperature environment
Working temperature	-20°C~+60 °C, Humidity 95% or less (non-condensing)
Window area(mm)	77×58
Automatic temperature control range	Without heating Fan on: 45°±5° Fan off: 35°±5°
Power	DC12V
Power consumption	Fan: 4W
Protection level	IP66
Material	Main: aluminum alloy Window: glass
Dimension(mm)	143×114.5×500
Matching power supply	DC12V 2A Power pack