


VISTA® H3 Hybrid Series Hardwired Zone Expansion Module


VISTAHEXPHW

The VISTAHEXPHW hardwired zone expansion module allows you to add 8 additional hardwired zones (16 with zone doubling) per module to a VISTA H3 system. The module has a built-in tamper allowing detection and reporting if the front cover is removed and is supervised so if the wiring is cut a supervision alarm will result indicating the module may not be operational. The flexibility to mount the module on a surface wall or to a gang box depending on the installation environment and the terminal strips are removeable to give installers easier access to help making wiring easier.

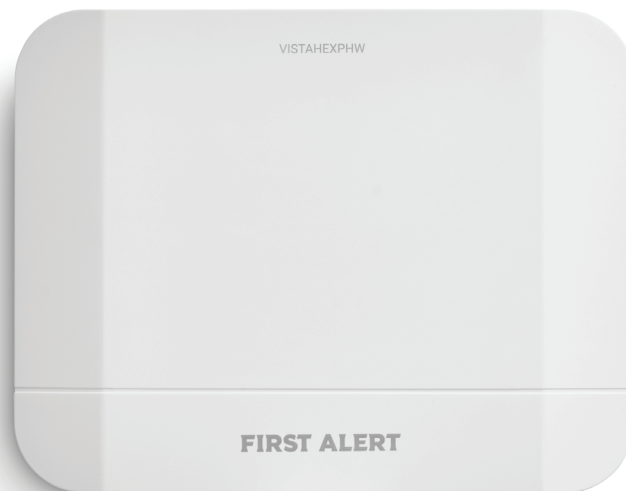

Specifications

- 8 hard wired zones per module
- Supports normally open, normally closed, double balanced, zone doubling and End of line resistors types
- Physical:
6.93" W X 5.43" H X 1.99 D or 176mm W X 138mm L X 50.5mm D
- Electrical:
Input Voltage = 12VDC nominal (10-14VDC)
Input Current = 40mA with all 8 zones used.
Note this does not include powered devices using the AUX terminals.
- Power supply regulation on board – powered off the VISTA H3 controls power and battery backed up if panel losses AC.
- Loop Response Time = 400ms
- Required Loop Resistance = 2K ohm
- Operating Temperature: 32 to 122 F, 0 to 50 C
- Operating Humidity: 0-95% Max (Relative Humidity)
- NFPA-72 Compliant

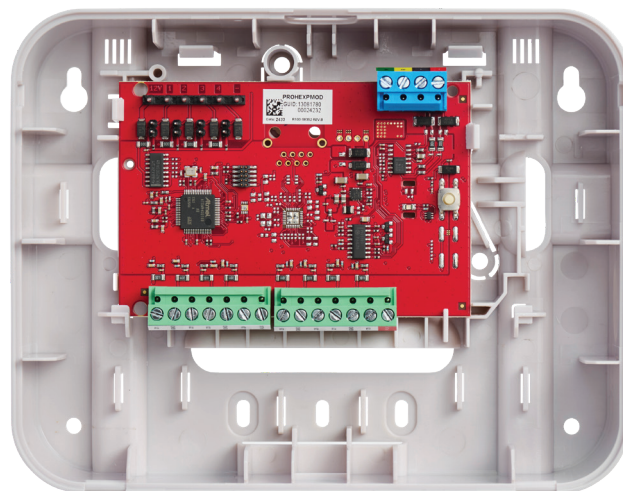

Ordering Information

Part #

VISTAHEXPHW

resideo

For more information
resideo.com/pro

Resideo Technologies, Inc.
2 Corporate Center Dr. Suite 100
P.O. Box 9040 Melville, NY 11747
1-800-645-7492

VISTAHEXPHW_DS | CP | 11/24
© 2024 Resideo Technologies, Inc.
All rights reserved