

HRB900

900+ TVL HR+ 2.0 Outdoor IR Bullet Camera

HRB900



Key Features



- 900+ TVL Horizontal Resolution.
- True Day Night.
- 3.6mm Fixed Lens, 0.1 Lux/F1.2.
- 20m IR Distance.
- High Dynamic Range
- Wide Operating Temperature Range: -40 to 60 °C (-40 to 140 °F).
- Smart IR.



Specifications

	HRB800
Cámara	
Image Sensor	1/3" HR+2.0
Signal System	PAL/NTSC
Effective Pixels	976 (H) x 496 (V)
Min. Illumination	0.1 Lux @ (F1.2,AGC ON), 0 Lux with IR
Shutter speed	PAL: 1/50 s to 1/100,000 s NTSC: 1/60 s to 1/100,000 s
Lens	3.6 mm Angle of view: 68.4°
Lens Mount	Board
Angle Adjustment	Pan: 0 - 360°, Tilt: 0 - 90°, Rotation: 0 - 360°
Day & Night	IR cut filter with auto switch
Horizontal Resolution	900+ TVL
Synchronization	Internal synchronization
Video Output	1Vp-p composite output (75 Ω/BNC)
S/N Ratio	More than 62 dB
General	
Working Temperature / Humidity	40 to 60 °C (-40 to 140 °F) / Humidity 90% or less (non-condensing)
Power Supply	12 Vdc
Power Consumption	Max. 1.8W (Max. 4W with IR cut filter on)
Ingress Protection	IP66
IR Range	20 meters
Dimensions	70 x 149.5 mm (2.76 x 5.89")
Weight	300 g (0.66 lbs)

Dimensions

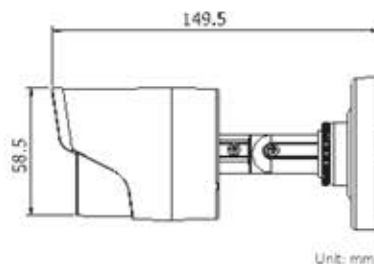

* All specifications are subject to change without notice.

* All brand names and registered trademarks are the property of their respective owners.