

LZR[®] - FLATSCAN S

COMPACT LASER SCANNER
FOR PERIMETER AND WORK OF ART
PROTECTION


User's Guide for software version SW 0100 and higher
(refer to tracking label on product)

INTRODUCTION



The FLATSCAN S is a laser sensor designed for the protection of work of art and other valuables and for the protection of perimeters. It generates an invisible curtain with 400 laser beams, which covers the detection area with a high resolution.

DESCRIPTION

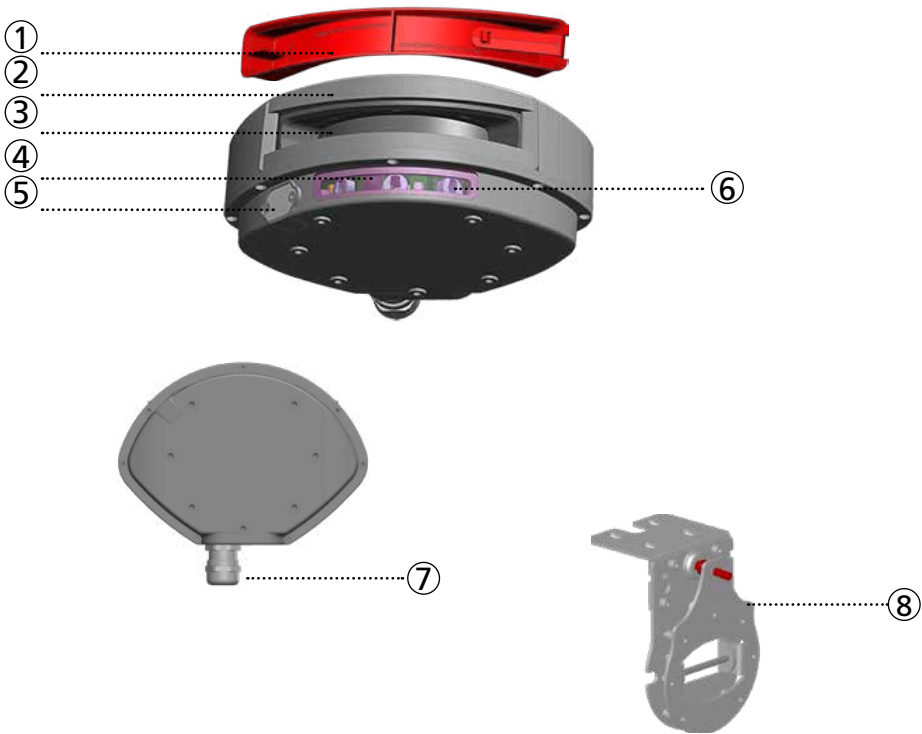

- | | |
|-----------------------------------|---|
| 1. Front cover (protective cover) | 5. USB connector (only for factory use) |
| 2. Housing | 6. Visible laser beams |
| 3. Laser window | 7. Cable gland |
| 4. LED-signal | 8. Bracket (optional) |

LED-SIGNALS



detection



error LED



LED flashes quickly



LED flashes slowly



power on



no power



LED flashes



LED is off

SYMBOLS



Caution!
Laser radiation



Remote control
sequence



Possible
remote control
adjustments



Factory values



Attention



Note

SAFETY TIPS



The device emits invisible (IR) and visible laser radiations. The visible laser beams can be activated during the installation process to adjust the position of the detection field.
Do not stare directly into the visible red beams.
The visible laser beams are inactive during normal functioning.



CAUTION!

Use of controls, adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.



Do not stare into the visible red laser beams.



The warranty is invalid if unauthorized repairs are made or attempted by unauthorized personnel.




Only trained and qualified personnel may install and setup the scanner.

INSTALLATION AND MAINTENANCE



Avoid extreme vibrations.



Do not cover the laser window.




Avoid moving objects and light sources in the detection field.



Avoid the presence of smoke and fog in the detection field.



Avoid condensation.




Avoid exposure to sudden and extreme temperature changes.




Avoid direct exposure to high pressure cleaning.



Do not use dry or dirty towels or aggressive products to clean the laser window.



Clean the laser window with compressed air. When needed, wipe the laser window only with a soft, clean and damp microfibre cloth.



Keep the scanner permanently powered in environments where the temperature can descend below -10°C.

INSTALLATION

 The device cannot be used for purposes other than its intended use, and particularly not the protection of persons. All other uses than those specified cannot be guaranteed by the manufacturer of the sensor.

1 MOUNTING



Please do a thorough inspection and evaluation of the installation area to make sure the sensor's installation will suit the intended use.

Only remove the front cover right before putting the sensor into service.
Make sure the laser window is never covered.


Bracket installation (optional):



Prepare the bracket for the installation.



Fix the Flatscan S to the bracket

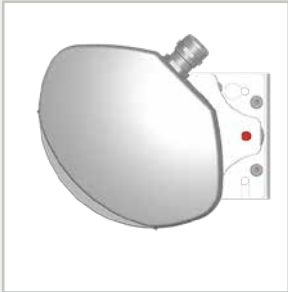

Choose an appropriate location and install the sensor on a solid surface.

2 WIRING



* Output status when scanner is operational (Factory default connection)

*2 Grounding: make sure that the sensor is correctly earthed.

 Since there is no monitoring, the red and blue cables must be connected to the power supply

HOW TO USE THE REMOTE CONTROL

Before using the remote control, please check the following points:

- 1. The max. distance between the sensor and the remote control is 4 m.
- 2. The sensor's curtain should not be perpendicular to a high reflective surface. A 3-degree angle is necessary between them to guarantee communication between the sensor and the remote control.
- 3. The authorized operator or installer can set a password to avoid unwanted modifications in the chosen settings



After unlocking, the red LED flashes and adjustments can be made by remote control.




If the red LED flashes quickly after unlocking, you need to enter an access code (1 to 4 digits).



To end an adjustment session, always lock the sensor.

ADJUSTING ONE OR MORE PARAMETERS



CHECKING A VALUE



X = THE NUMBER OF FLASHES INDICATES THE VALUE OF THE PARAMETER.

4 1 2 = field width: 4.2 m

RESTORING TO FACTORY VALUES



SAVING AN ACCESS CODE

An access code is recommended for sensors installed close to each other.

The setting will take effect 1 minute later.



DELETING AN ACCESS CODE




After power on, you have 1 minute to choose this setting.



30 minutes after last use, the sensor locks the access to the remote control session.

Cut and restore power supply : the remote control session will be accessible again during 30 minutes.

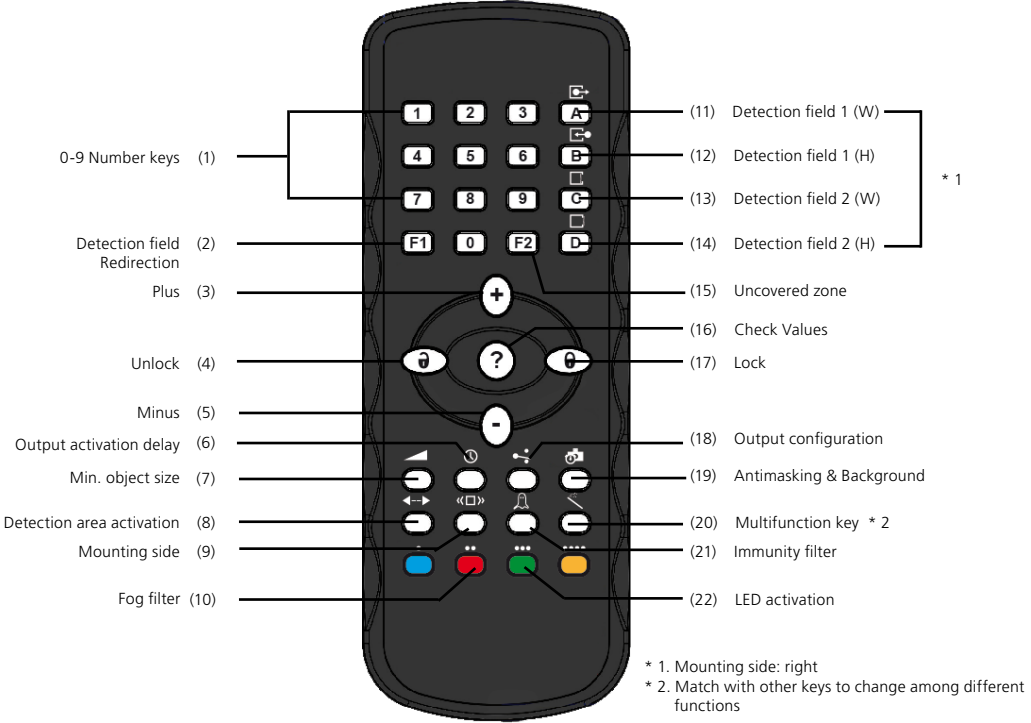


VISIBLE SPOTS



The visible spots will be automatically deactivated after 10 minutes.
30 minutes after the installation, you will need to reboot the sensor to be able to re-activate the visible spots.


ALIGNMENT

- Check the sensor's wiring.
- Set power to on.
- Switch on the visible spots, then align the curtain position precisely (refer to remote control instruction). If necessary, adjust the tilt angle (with the universal bracket) to make sure the curtain covers the whole detection area
- The laser spots have an oval shape. The further the laser spot hits, the bigger the spot diffuses (see diagram below).

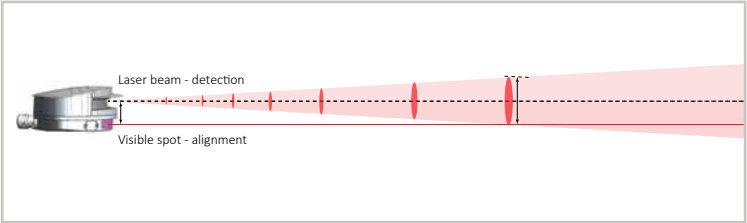

 Do not stare into the visible beams directly!
Please make sure the detection curtain is in the right position for the intended application.

MOUNTING SIDE

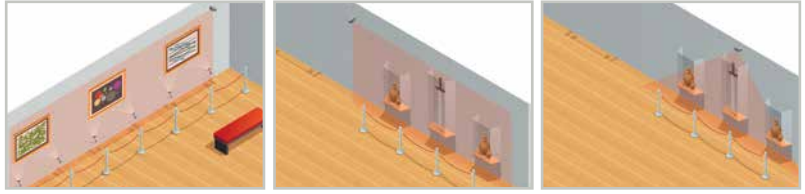

right


left

center


The Flatscan S can be placed either on the left side, right side or in a central position.

DETECTION FIELD

FIELD 1

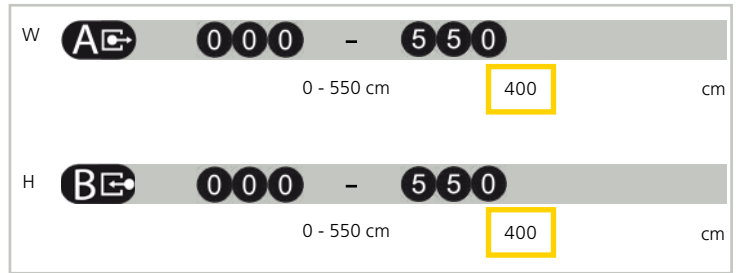

FIELD 2

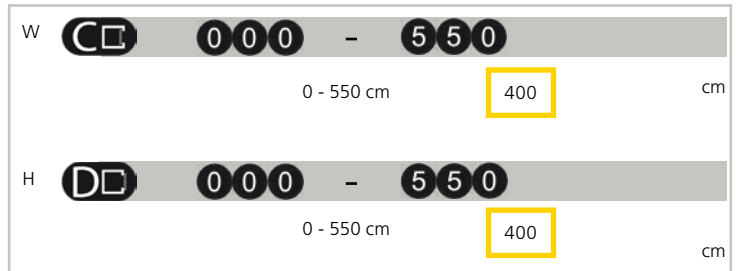

Detection area: detection will only be triggered by objects located in the detection area. The dimension of detection area can be adjusted via the parameter.

Please note that the detection range can be guaranteed with a 5% reflectivity @4m diagonal when the fog filter value is set to 0.

If the fog filter value is not set to 0, then the guaranteed detection distance with 5% reflectivity will be shortened.




UNCOVERED ZONE




Uncovered zone: can be increased in case of snow, dead leaves, etc.
Measured in specific conditions and determined by application and installation.

IMMUNITY FILTER

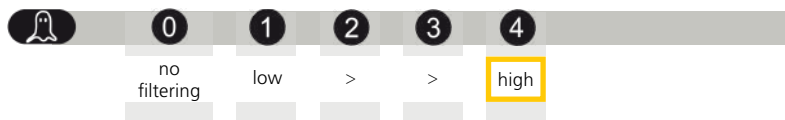

Immunity Filter: is increased to filter out environmental interferences such as rain or snow which can trigger false detection.

FOG FILTER

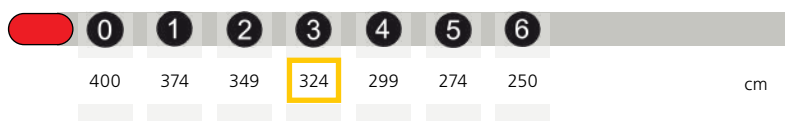

Fog filter: you can change the max. detection distance with a 5% reflectivity.

MIN. OBJECT SIZE



Minimum object size: detection will only happen when the detected object size is bigger than the given minimum object size.

OUTPUT ACTIVATION DELAY



Output activation delay: the detection will generate an output only when the detection lasts longer than the chosen time.



FACTORY VALUES

DETECTION AREA ACTIVATION

	0	1	2	9
	OFF	field 1	field 2	field 1 and field 2



Detection area activation: detection field 1 or detection field 2 can be activated or deactivated according to the application.

DETECTION FIELD REDIRECTION

	F1	0	1	2	3
R1		field 1	field 2	field 1 or field 2	error alarm
R2		field 2	field 1	error alarm	field 1 or field 2

OUTPUT CONFIGURATION

	1	2	3	4	
R1	NO	NC	NC	NO	
* R2	NC	NO	NC	NO	

NO = normally open

NC = normally closed

NO POWER

NO DETECTION

DETECTION

* R2 default connection: Pink/ Grey

ANTIMASKING & BACKGROUND

	0	1	2	3
antimasking	OFF	OFF	ON	ON
background	OFF	ON	OFF	ON




Antimasking: when the laser window is covered, the sensor will enter the error mode.
Background: when the background has changed, the sensor will enter the error mode.

LED ACTIVATION

	0	1
LED OFF		LED ON




TEACH-IN

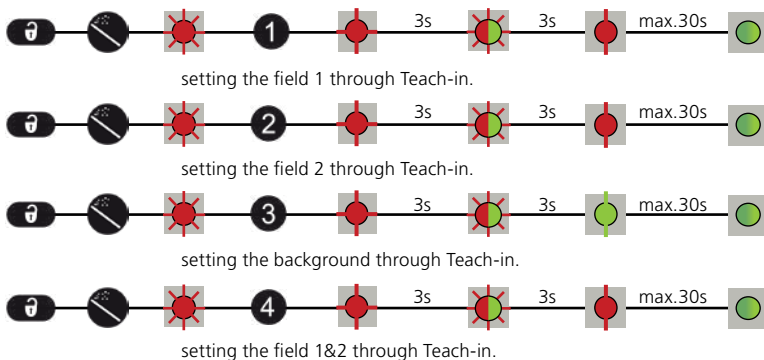

Teach-in: the sensor can automatically learn its environment and its detection field. It will adapt its detection field when the background changes.

RESET TO FACTORY SETTINGS

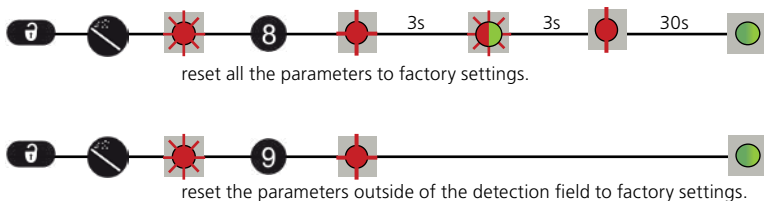

IMPORTANT: Test the good functioning of the installation before leaving the premises.

TROUBLESHOOTING

	The ORANGE LED is on permanently.	The sensor encounters a memory problem.		Send the sensor back for a technical check-up.
	The ORANGE LED flashes 1 x /2 x /3 x every 3 seconds.	The sensor signals an internal fault. If the internal error still appears after 3 resettings, the LED will flash 9 times and the sensor will be locked.	1	Cut and restore power supply.
			2	If orange LED flashes again, send the sensor back to manufacturer.
	The ORANGE LED flashes 4 x every 3 seconds.	Masking or background error	1	Remove any pollution on the front window
			2	Check background and remove any object that could provoke the error
	The ORANGE LED flashes 5 x every 3 seconds.	Error during the teach-in process.		Relaunch a teach-in process.

TECHNICAL SPECIFICATIONS

Technology	LASER scanner, time-of-flight measurement
Detection mode	Presence
Max. detection range	Max. 5.5m*5.5m (4m@5% reflectivity)
Opening angle	90°
Angular resolution	0.23° (400 spots within 90°)
Optical characteristics (IEC/EN 60825-1: 2014)	Wavelength 905nm; output power < 0.1 mW ; CLASS 1 Wavelength 635nm; output power < 1 mW ; CLASS 2 - Visible spot
Supply voltage	12-24V DC ± 15% (to be supplied from a SELV power source only)
Power consumption	≤ 2.3W, peak current: 1A
Response time	Max. 50ms + output activation delay
Output	1 opto (galvanic isolation - polarity free) Max. switching voltage: 42V AC/DC Max. switching current: 100mA 1 Relay (free of potential contact) Max. contact voltage: 42V AC/DC Max. contact current: 1A (resistive) Max. switching power: 30W DC/60VA AC
LED-signals	1 tri-colored LED: detection / output status
Dimensions	124mm (L) × 90mm (H) × 50mm (D) (without bracket)
Colour	Black
Tilt angles	±3° (with bracket)
Protection degree	IP66 (IEC/EN 60529)
Temperature range	-30°C to +60°C if powered
Humidity	0-95% non-condensing
Vibrations	< 2G
Conformity	IEC/EN 60825-1; IEC/EN 61000-6-2; IEC/EN 61000-6-3

Specifications are subject to change without prior notice. All values are measured in specific conditions.



SAFETY INSTRUCTIONS
Only trained and qualified personnel may install and setup the scanner.
The warranty is void if unauthorized repairs are made or attempted by unauthorized personnel.

BEA SA | LIEGE Science Park | ALLÉE DES NOISÉTIERS 5 - 4031 ANGLEUR [BELGIUM] | T +32 4 361 65 65 | F +32 4 361 28 58 | INFO@BEA.BE | WWW.BEA-SENSORS.COM



This product should be disposed of separately from unsorted municipal waste.



THIS USER'S GUIDE IS AN INFORMATIVE DOCUMENT AND CAN NOT BE SEEN AS A COMMITMENT OF RESULT.