

# HG6144F

---

High Bandwidth | Smart O&M  
Smart Interconnection | Smart Service



## Overview

HG6144F is a GPON AX3000 dual-band Wi-Fi 6 gateway for home. Downlink has 4 GE ports and CATV port. It can meet the needs of wired and wireless internet access, fixed phone, cable TV and other functions. HG6144F also support smart and remote O&M, realizing simple deployment and management.



## Physical Parameters

Type	Instruction
Dimensions (H*W*D)	41*161*223mm
Weight	About 458 g
Operating Temperature	-5°C~45°C
Storage Temperature	-20°C~70°C
Operating Humidity	10%~95%(no condensation)
System Power Supply	DC 12V, 2.0A
Power Adapter input	AC 100~240V, 50~60Hz
Power Consumption	Typical:12W; Max:16W
Memory	256M Flash, 512 RAM
Ports	GPON+4*GE+1*POTS+Wi-Fi+CATV+2*USB
Indicators	Power/PON/LOS/Internet/Phone/LAN/WLAN/WPS/CATV

## Interfaces Parameters

Type	Instruction
GPON Port	Class B+
	Receiver sensitivity: -28dBm
	Overload optical power: -8dbm
	Wavelengths: US 1310nm, DS 1490nm
	ITU-T G.984
	Supports GEM encapsulation & Ethernet over GEM
	Flexible mapping between GEM and TCONT
	Bi-direction FEC and downlink FEC performance statistics
	SR-DBA or NSR-DBA, DBA piggy-back DBRu Mode 0
	Multiple encryption modes: unicast data channel, AES-128, OMCI channel, negotiation with OLT
Multiple authentication modes: SN, Password, SN + Password and LOID	

Type	Instruction
Ethernet Port	Supports the IEEE 802.1Q VLAN standard Ethernet port-based VLAN tags and tag removal
	1:1VLAN or VLAN transparent transmission, up to 4095 VLANs
	Supports learning up to 1k MAC addresses
	Supports Layer 2 / Layer 3 wire-speed forwarding
	Supports bandwidth control granularity of 64 kbit/s

## Interfaces Parameters

Type	Instruction
Wi-Fi Port	IEEE 802.11 b/g/n/ax (2.4G)
	IEEE 802.11 b/g/n/ax (5G)
	Dual band: 2.4G(2*2MIMO) and 5G(2*2MIMO)
	8 SSIDs(4+4)
	Antenna gain: 5 dBi
	Air interface rate: :574 Mbit/s (2.4G), 2402 Mbit/s(5G)
	Beamforming
	Bandsteering
	Supports Open System, Shared Key, WPA, WPA2, WPA3, WPA-PSK, WPA2-PSK, WPA3-PSK and WPS Authentication
	Supports automatic selection and manual configuration of channels
	OFDMA, MU-MIMO, and 1024QAM
160MHz frequency bandwidth	

Type	Instruction
POTS Port	Maximum REN: 2
	G.711A/μ, G.729a/b and G.722 encoding/decoding
	T.30/T.38/G.711 fax mode
	DTMF

Type	Instruction
CATV Port	Bandwidth 47MHz-1002MHz
	Output resistance: 75 ohms

Type	Instruction
USB Port	1*USB 3.0 + 1*USB 2.0
	FTP-based network storage
	External USB dongle expansion capability

## Product Function

Type	Instruction
Smart O&M	OMCI/Web UI/TR-069
	Supports automatic service provisioning, management and software upgrade remotely based on OMCI/TR-069
	Supports delivering the XML configuration file via the TR-069
	Supports alarm synchronization and performance statistics


Type	Instruction
Smart Service	Triple play service: HIS, IPTV, Voice
	Powerful QoS: <ul style="list-style-type: none"> <li>• 802.1p Priority</li> <li>• SP/WRR/SP+WRR</li> </ul>
	Flexible connection modes: Wire(GE/POTS) + Wi-Fi

Type	Instruction
Smart Interconnection	Ethernet Port 10M/100M/1000M auto-negotiation
	IPv4/IPv6 auto-negotiation
	Easy to connect to ACS by TR-069

Type	Instruction
L3 Features	IPv4/IPv6 dual stack, and DS-Lite
	PPPoE/Static/DHCP
	NAT/NAPT
	DDNS/DNS Relay
	Static/default routes

Type	Instruction	Type	Instruction
Security	Anti-DoS attack	Multicast	IGMP v2/v3 snooping
	Firewall and ACL function		MLD v1/v2 snooping
	Filtering based on MAC/IP/URL address		Up to 1024 multicast groups

# Networking Topology

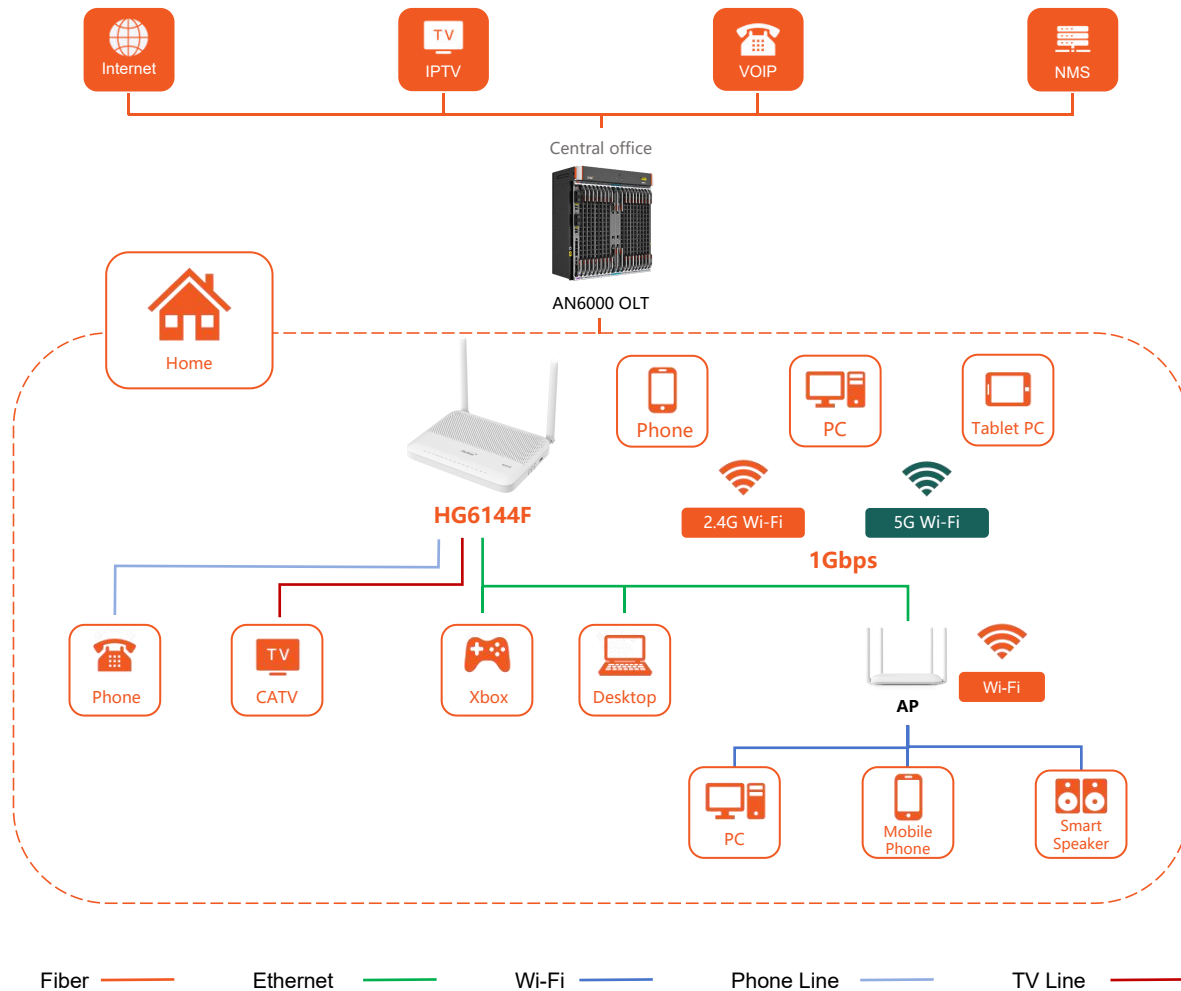

Copyright © 2024 FiberHome Telecommunication Technologies Co.,LTD. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of FiberHome Telecommunication Technologies Co.,LTD.

## Trademarks and Permissions

**FiberHome**® is the trademark of FiberHome Telecommunication Technologies Co.,LTD. All other trademarks and trade names mentioned in this document are the property of their respective holders.

## Notice

The purchased products, services and features are stipulated by the contract made between FiberHome and the customer. All or part of the products, services and features described in this document may not be within the purchase scope or the usage scope. Unless otherwise specified in the contract, all statements, information, and recommendations in this document are provided "AS IS" without warranties, guarantees or representations of any kind, either express or implied. The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.

## FiberHome Telecommunication Technologies Co.,LTD.

Address: No.6, Gaoxin Lu, Donghu Gaoxin Industrial Park, Wuhan, Hubei, People's Republic of China  
 Website: <https://en.fiberhome.com>