

DS-QAPS1R40-12
12-inch Full Range Speaker 400W




- Woofer: 1x12" / Tweeter: 1x1.5"
- 98 dB@ 2.83V/1 m Sensitivity
- 121 dB (126 dB peak) Rated Maximum SPL
- 45 Hz-20 kHz (-10 dB) bandwidth
- 400W Rated Power

▪ Specification


Model		DS-QAP51R40-12
Speaker	Impedance	8 Ω
	Rated Power	400W
	Sensitivity(1 m, 1 W)	98 dB@ 2.83V/1 m
	Max. Acoustic Pressure	121 dB (126 dB peak)
	Frequency Response	45 Hz-20 kHz (-10 dB)
	Speaker Unit	Woofer: 1x12" / Tweeter: 1x1.5"
	Coverage Angle	90°x60°(HxV)
General	Material	15 cl multi-layer solid wood plywood
	Dimension	H500mmxW305mmxD300mm
	Weight	Approx. 25 kg (55 lb.)
	Color	Matte black raindrop paint
	Packing List	Speaker*1/Product Manual*1/Certificate*1/Warranty Card*1
	Installation	Vertical hanging/horizontal hanging/bottom support
	Application Temperature Range	-30~+60°C, 95% No condensation

▪ Load Diagram

Frequency response curve

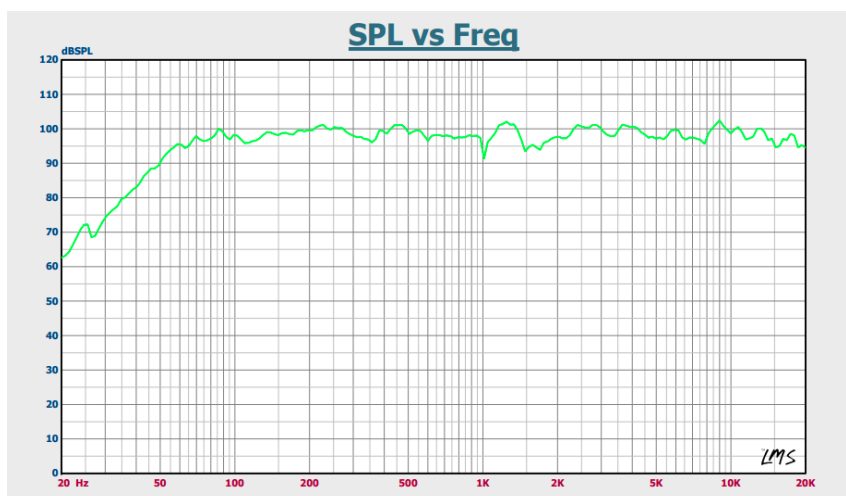


Impedance curve

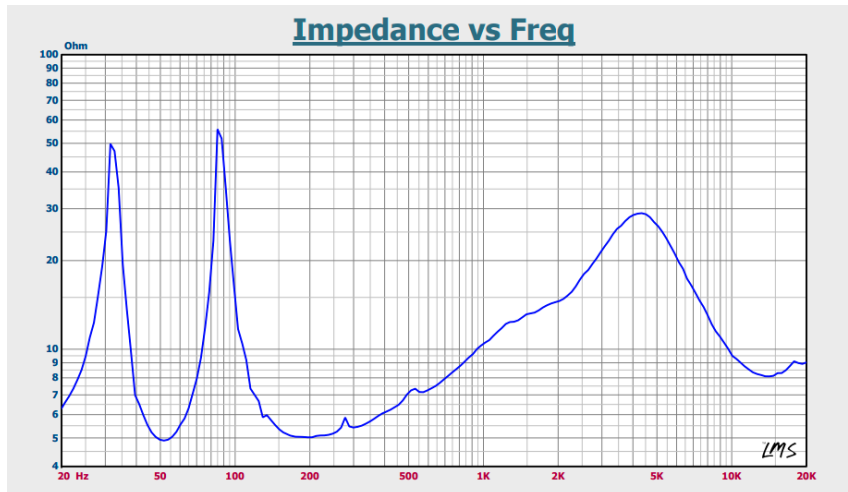

▪ **Available Model**

DS-QAPS1R40-12

▪ **Dimension**

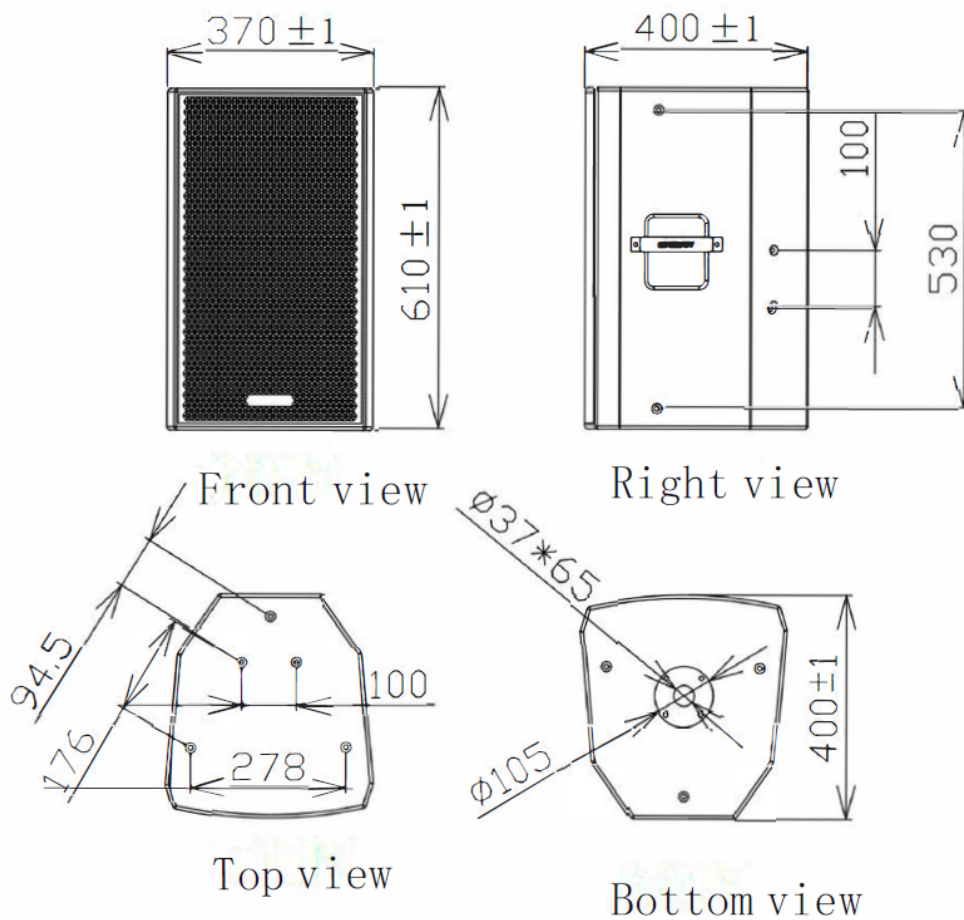

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq