




V2804BE36-H

1XPON+4LAN+1USB+Wi-Fi 7 HGU ONT

Key Features:



High Performance Solution



Next-Gen Gigabit Wi-Fi 7
2.4GHz & 5GHz Dual Band
Speed up to 3.6Gbps



Tray-mounted Fiber
Structure
Triple-play Services



180° Foldable
Antenna


Introduction:

V2804BE36-H (1*2.5GE+3*GE+1*USB 2.0+Wi-Fi 7 XPON HGU ONT) is a broadband access device designed to meet the demands of fixed network operators for FTTH and triple-play services.

This ONT is based on a high-performance chip solution, supporting XPON dual-mode technology (EPON and GPON). With WiFi speeds of up to 3600Mbps, it also supports IEEE 802.11a/b/g/n/ac/ax/be WiFi 7 technology and other Layer 2/Layer 3 features, providing data services for carrier-grade FTTH applications. In addition, this ONT supports OAM/OMCI protocols, allowing configuration and management of various services on the VSOL OLT, making it easy to manage and maintain, and ensuring QoS for various services. It complies with international technical standards such as IEEE802.3ah and ITU-T G.984.

The V2804BE36-H features 180° foldable antennas. With a bottom disc fiber structure design, it can be placed on a desktop or wall-mounted, adapting effortlessly to various scene styles!

Application Chart:

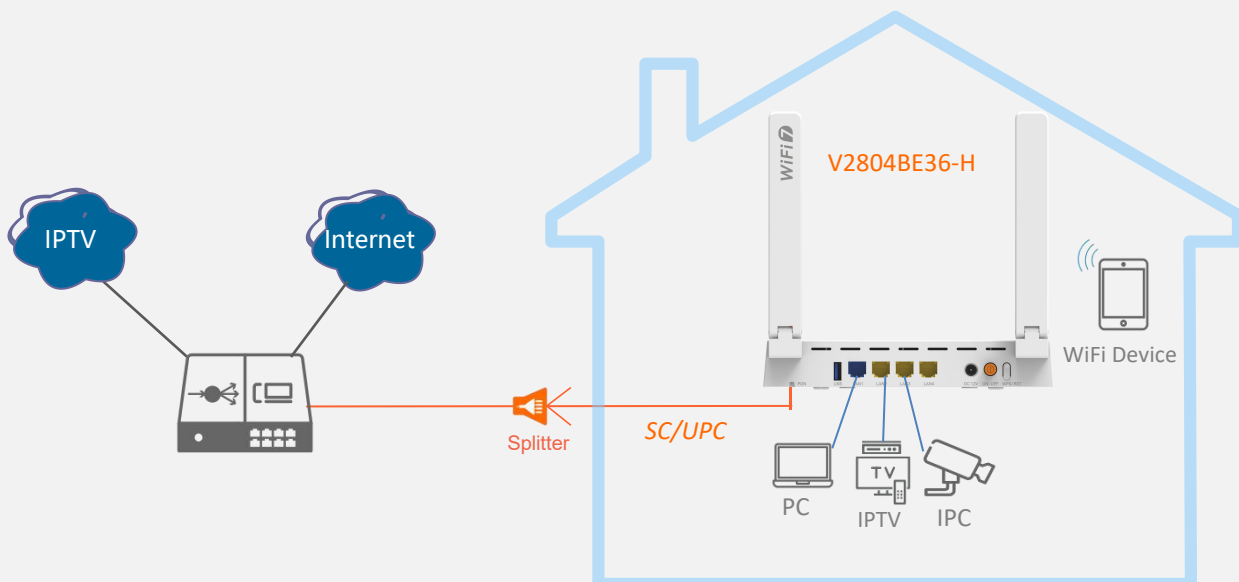

○ Hardware Parameter

Dimension	200mm×156.8mm×32.33mm(L×W×H)
Net weight	0.35Kg
Operating condition	Operating temp: -10 ~ +55°C Operating humidity: 5 ~ 95% (non-condensed)
Storing condition	Storing temp: -40 ~ +70°C Storing humidity: 5 ~ 95% (non-condensed)
Power adapter	12V/1.0A
Power supply	≤13W
Interface	1*XPON+1*2.5GE+3*GE+1*USB2.0+Wi-Fi 7
Indicators	PWR ,PON ,LOS ,WAN ,LAN1~4 ,2.4G ,5G , WPS ,USB

○ Interface parameter

PON Interface	<ul style="list-style-type: none"> • 1XPON port(EPON PX20+ and GPON Class B+) • SC single mode, SC/UPC connector • TX optical power: 0~+4dBm • RX sensitivity: -27dBm • Overload optical power: -3dBm(EPON) or -8dBm(GPON) • Transmission distance: 20KM • Wavelength: TX 1310nm, RX1490nm
User interface	• 1×2.5GE+3×GE, Auto-negotiation,RJ45 ports
Antenna	2.4GHz\5GHz 2T2R, external antennas

○ Function Data

O&M	<ul style="list-style-type: none"> • WEB/TELNET/OAM/OMCI/TR069 • Support private OAM/OMCI protocol
Internet connection	<ul style="list-style-type: none"> • Support routing mode • Support bridge mode
Multicast	<ul style="list-style-type: none"> • IGMP v1/v2/v3, IGMP snooping • MLD v1/v2 snooping
WIFI	<ul style="list-style-type: none"> • Wi-Fi 7: 802.11a/n/ac/ax/be 5GHz, 2.4GHz • WiFi: 2.4GHz\5GHz 2×2, dual band antennas, rate up to 3.6Gbps,Multiple SSID • WiFi Encryption: WEP-64/WEP-128/ WPA/WPA2/WPA3 • Support OFDMA, MU-MIMO, Dynamic QoS, 4096-QAM • Smart Connect for one Wi-Fi name - One SSID for 2.4GHz and 5GHz dual band • Easy-Mesh R5
L2	802.1p Cos,802.1Q VLAN
L3	IPv4/IPv6, DHCP Client/Server,PPPoE, NAT, DMZ, DDNS,Parental Control
Firewall	Anti-DDOS, ACL with URL, MAC, and IP-based filtering

Product Name	Product Description	Accessories
V2804BE36-H	1*XPON+1*2.5GE+3*GE+1*USB 2.0+Wi-Fi 7	AC-DC power adaptor: DC12V / 1.0A